


## ROMEO MOON F

Designed by Philippe Starck, 1996


F6109000

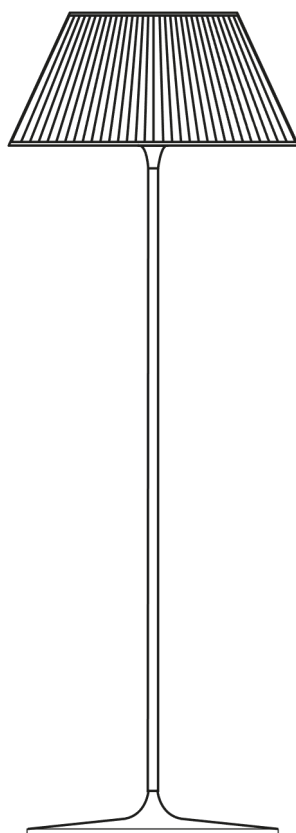

## ROMEO MOON F

F6109000

EN

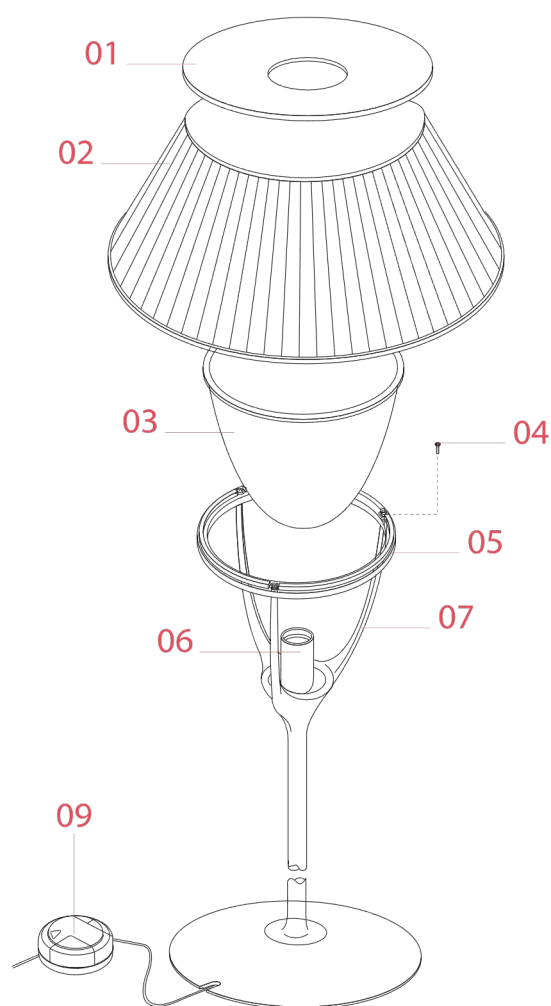

- 01. RF03205 – Romeo F/T2 cover ring
- 02. RF6110300 – Romeo Moon F/S2/T2 crown
- 03. RF03321 – Acid-etched diffuser
- 04. RF6100200 – Kit of screws & bolts
- 05. RF05307 – Support ring
- 06. RF04169 – E27 Lamp holder
- 07. RF02812 – Grey support bracket
- 09. RF28045 – Led 220/240V 40-250W 4-100W Rondò dimmer

ROMEO MOON F F6109000

EN

## RF03205

ROMEO F/T2 COVER RING



WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - [www.flos.com](http://www.flos.com)  
Flos reserves the right to introduce any changes to its own models, without prior notice.

ROMEO MOON F F6109000

EN

**RF03205**

ROMEO F/T2 COVER RING

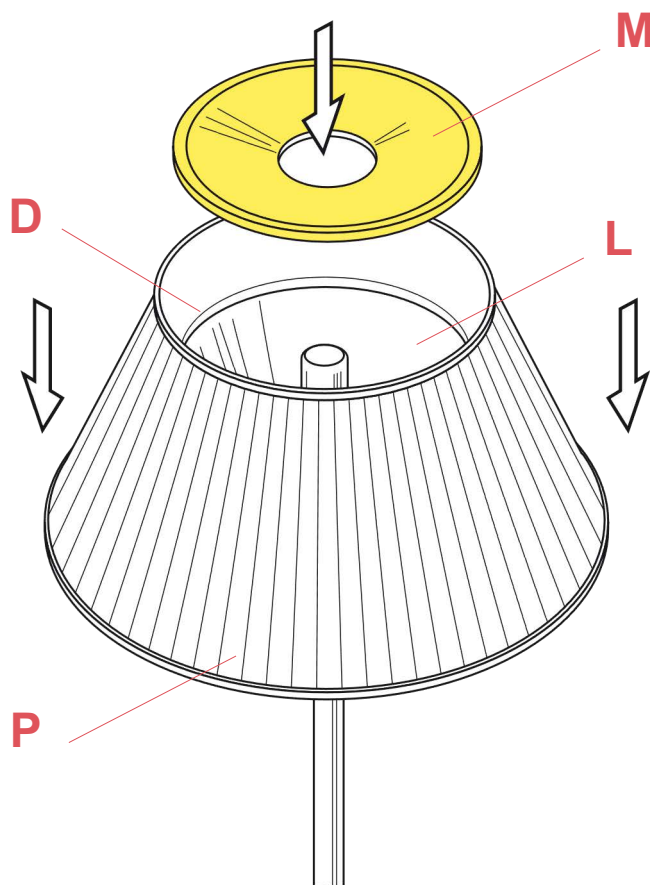


Fig.1

Place the glass shade (P) on the support ring (D).  
Rest the covering ring (M) on the internal glass diffuser (L).


WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

ROMEO MOON F F6109000


EN

## RF6110300

ROMEO MOON CROWN



Romeo  
Moon F  
p.05



Romeo  
Moon S2  
p.31

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - [www.flos.com](http://www.flos.com)  
Flos reserves the right to introduce any changes to its own models, without prior notice.

ROMEO MOON F F6109000

EN

**RF6110300**

ROMEO MOON CROWN

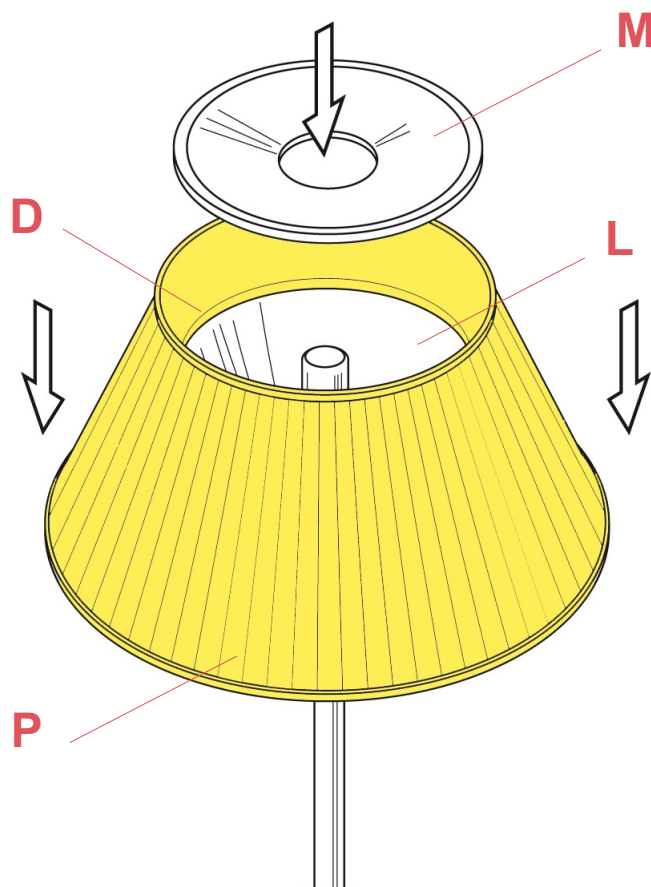


Fig.1

Place the glass shade (P) on the support ring (D).  
Rest the covering ring (M) on the internal glass diffuser (L).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.


©2021 Flos - All rights reserved - [www.flos.com](http://www.flos.com)  
Flos reserves the right to introduce any changes to its own models, without prior notice.

ROMEO MOON F F6109000

EN

## RF03321

ACID-ETCHED DIFFUSER



Romeo  
Moon F  
p.07



Romeo  
Soft F  
p.09

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - [www.flos.com](http://www.flos.com)  
Flos reserves the right to introduce any changes to its own models, without prior notice.

ROMEO MOON F F6109000

EN

**RF03321**

ACID-ETCHED DIFFUSER

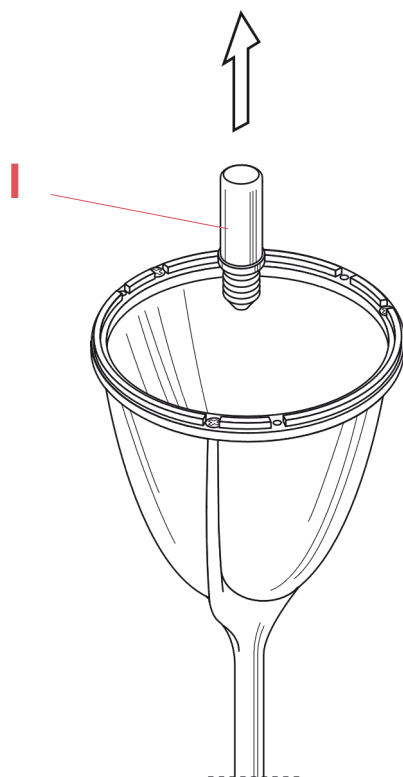


Fig.1

Remove the lamp bulb (I) if still present on the lamp device.

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - [www.flos.com](http://www.flos.com)  
Flos reserves the right to introduce any changes to its own models, without prior notice.



ROMEO MOON F F6109000

EN

## RF03321

ACID-ETCHED DIFFUSER

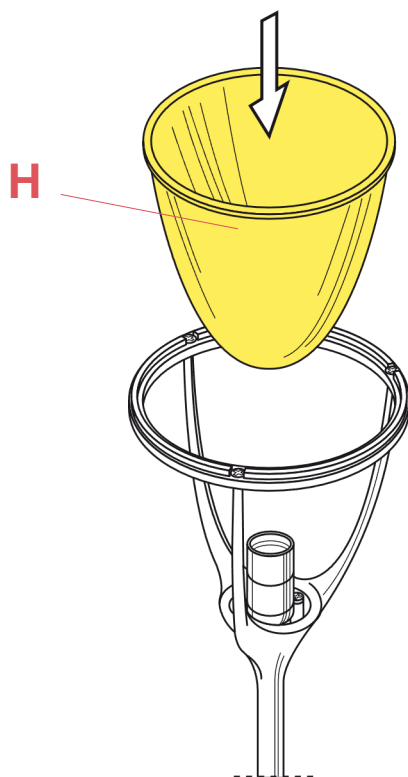


Fig.2

Insert the diffuser (H).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

ROMEO MOON F F6109000

EN

## RF03321

ACID-ETCHED DIFFUSER

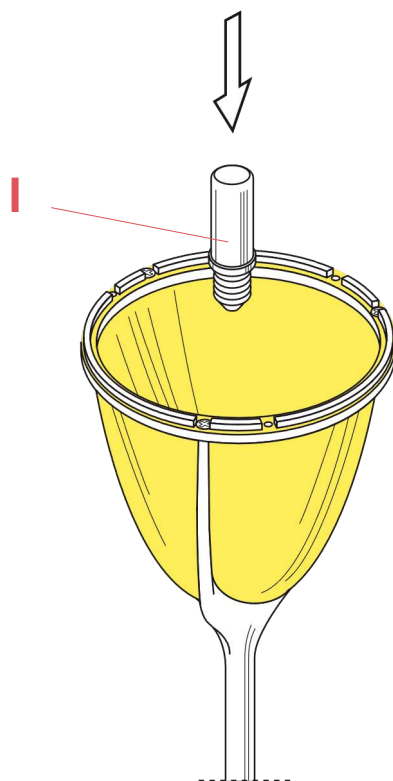


Fig.3

Insert the lamp-bulb (I).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

ROMEO MOON F F6109000

EN

## RF03321

ACID-ETCHED DIFFUSER

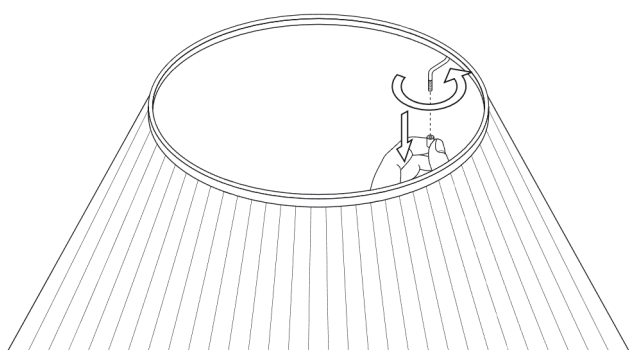


Fig.4

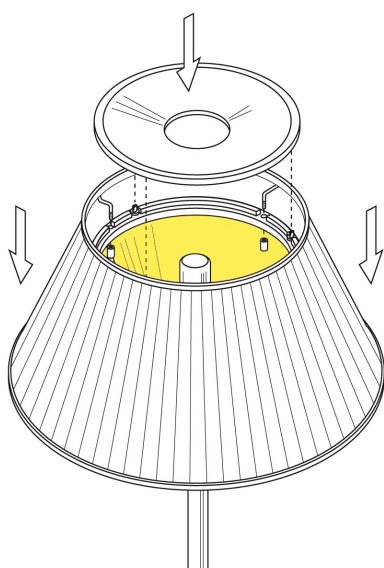


Fig.5

Position the fabric lamp shade (N) on the support ring (D) ensuring to insert the hook threaded screws (R) into the apposite holes present in the support ring (D), fasten the small bolts (Q).  
Rest the covering ring (O) on the pins (G).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - [www.flos.com](http://www.flos.com)  
Flos reserves the right to introduce any changes to its own models, without prior notice.

ROMEO MOON F F6109000

EN

## RF6100200

KIT OF SCREWS/BOLTS FOR ROMEO



Romeo  
Moon F  
p.12



Romeo  
Moon T1  
p.12



Romeo  
Soft F  
p.12



Romeo  
Soft T1  
p.14

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

ROMEO MOON F F6109000

EN

**RF6100200**

KIT OF SCREWS/BOLTS FOR ROMEO

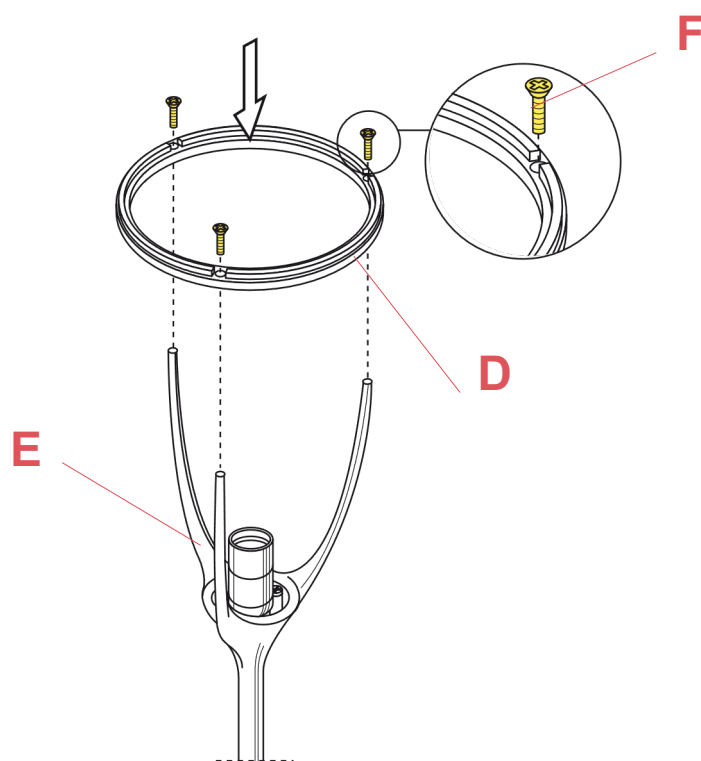


Fig.1

Rest the support ring (D) on the support brackets (E) and lock it by fastening it with the screws (F).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

ROMEO MOON F F6109000

EN

## RF6100200

KIT OF SCREWS/BOLTS FOR ROMEO

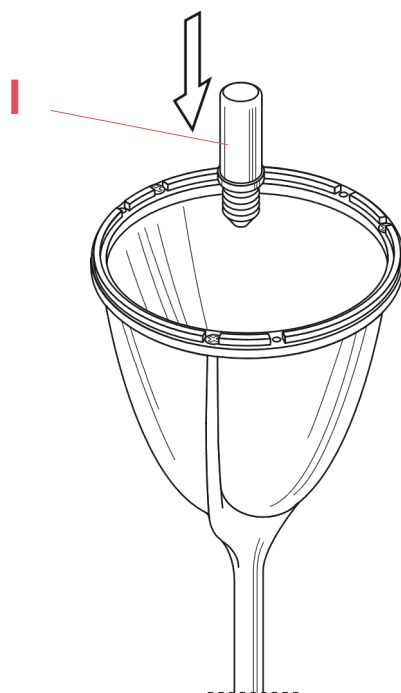


Fig.2

Insert the lamp-bulb (I).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - [www.flos.com](http://www.flos.com)  
Flos reserves the right to introduce any changes to its own models, without prior notice.

ROMEO MOON F F6109000

EN

**RF6100200**

KIT OF SCREWS/BOLTS FOR ROMEO

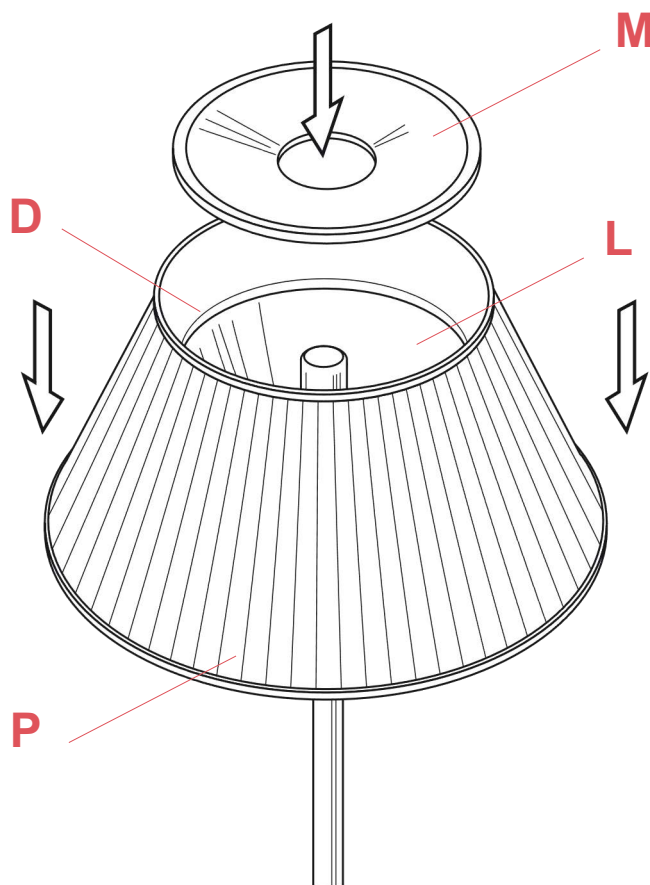


Fig.3

Place the glass shade (P) on the support ring (D).  
Rest the covering ring (M) on the internal glass diffuser (L).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.


©2021 Flos - All rights reserved - [www.flos.com](http://www.flos.com)  
Flos reserves the right to introduce any changes to its own models, without prior notice.

ROMEO MOON F F6109000

EN

## RF05307

SUPPORT RING



Romeo  
Moon F  
p.16



Romeo  
Soft F  
p.14

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.



ROMEO MOON F F6109000

EN

**RF05307**

SUPPORT RING

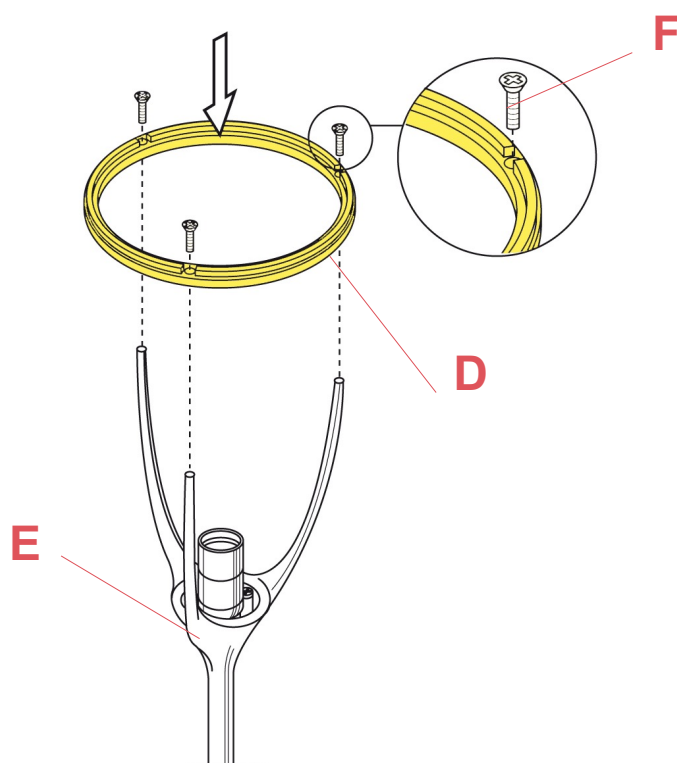


Fig.1

Rest the support ring (D) on the support brackets (E) and lock it by fastening it with the screw/pivots (F).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

ROMEO MOON F F6109000

EN

## RF05307

SUPPORT RING

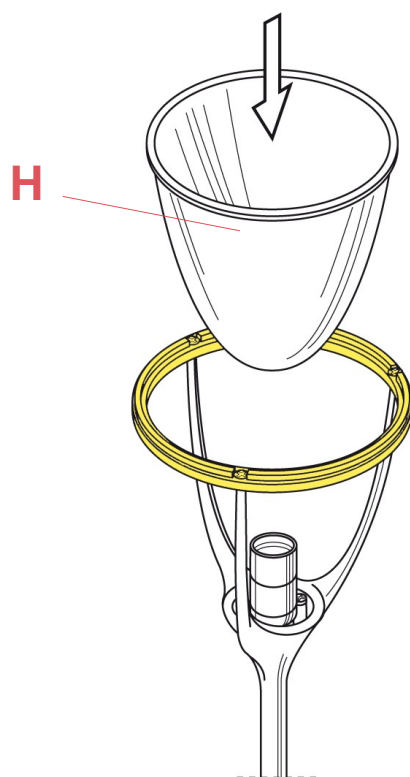


Fig.2

Insert the diffuser (H).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - [www.flos.com](http://www.flos.com)  
Flos reserves the right to introduce any changes to its own models, without prior notice.

ROMEO MOON F F6109000

EN

## RF05307

SUPPORT RING

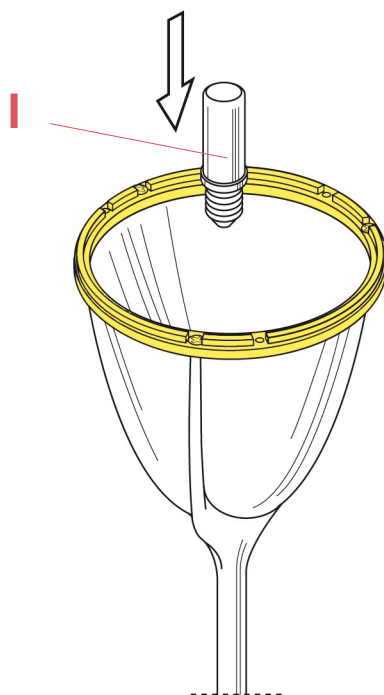


Fig.3

Insert the lamp-bulb (I).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

## RF05307

### SUPPORT RING

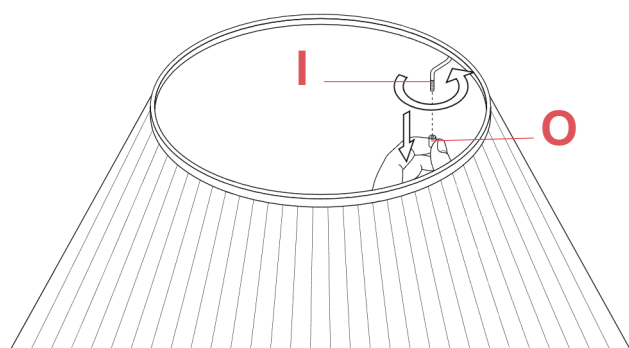


Fig.4

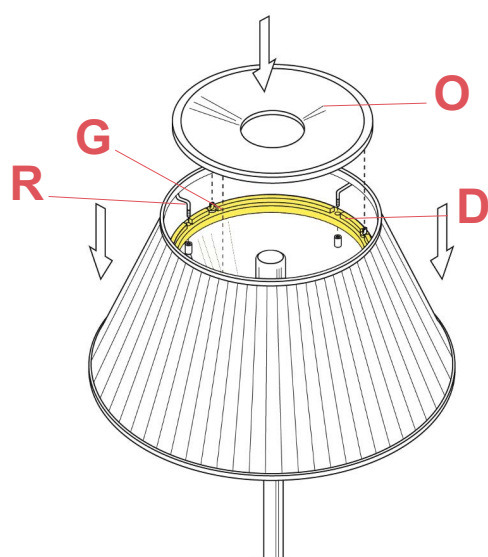


Fig.5

Position the fabric lamp shade (N) on the support ring (D) ensuring to insert the hook threaded screws (R) into the apposite holes present in the support ring (D), fasten the small bolts (Q).  
Rest the covering ring (O) on the pins (G).

ROMEO MOON F F6109000

EN

## RF04169

E27 LAMP HOLDER



Romeo  
Moon F  
p.21



Romeo  
Moon T1  
p.21



Romeo  
Soft F  
p.17



Romeo  
Soft T1  
p.22

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

## RF04169

E27 LAMP HOLDER

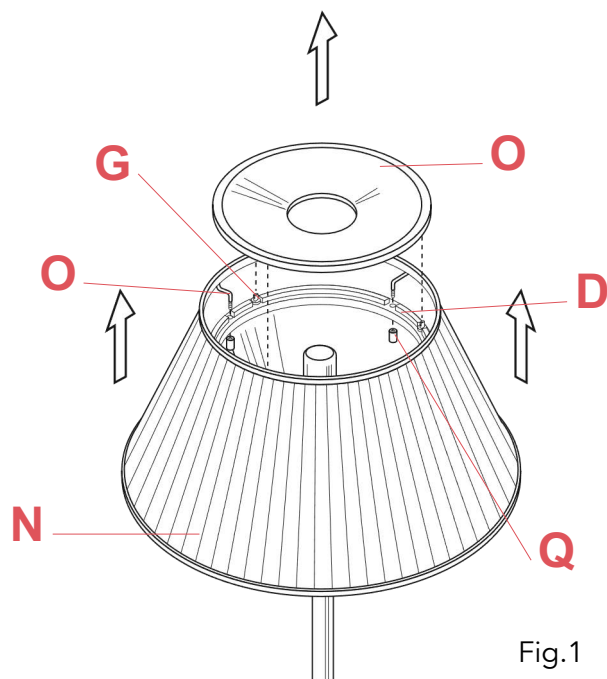


Fig.1

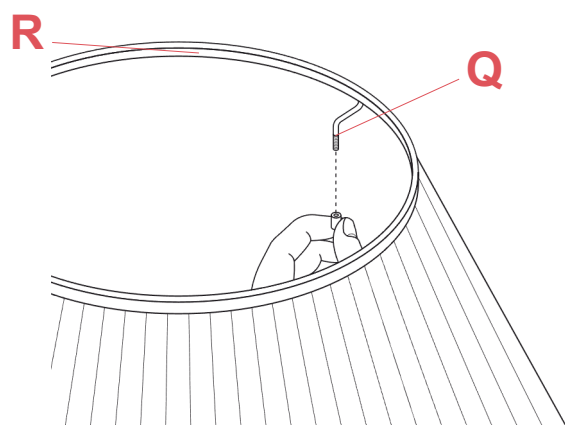


Fig.2

Remove the cover ring (O).  
Remove the fabric lamp shade (N) by  
unfastening the small bolts (Q).  
Unhook the fabric shade from the support ring  
(D).

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

ROMEO MOON F F6109000

EN

## RF04169

E27 LAMP HOLDER

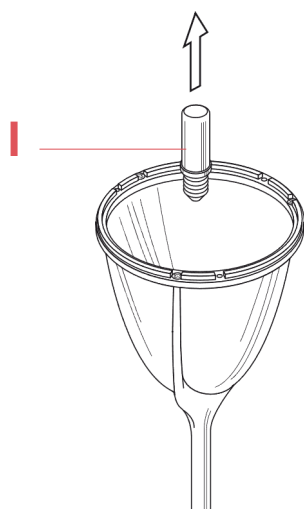


Fig.3

Remove the lamp-bulb (I) if still present on the lamp device.

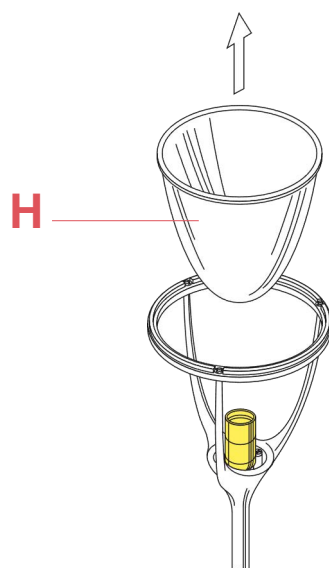


Fig.4

Remove the diffuser (H).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

## RF04169

E27 LAMP HOLDER

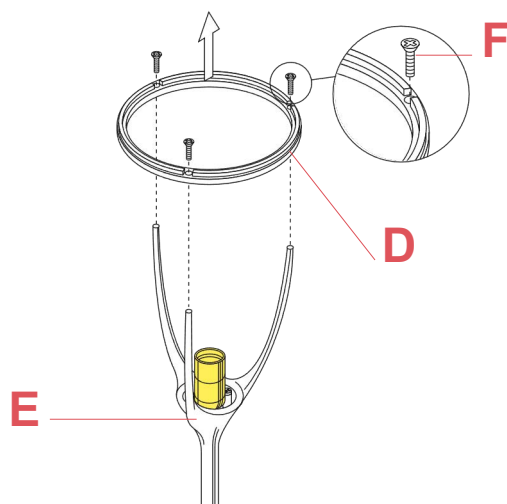


Fig.5

Remove the support ring (D) from the support brackets (E) by unfastening the screw/pivot.

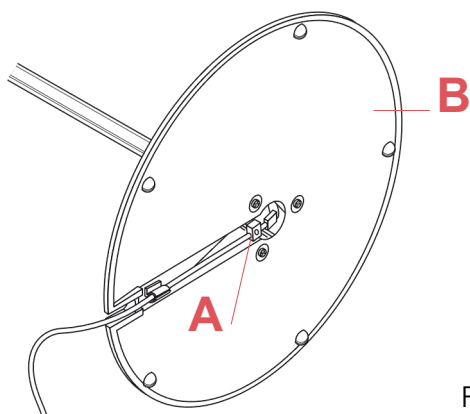


Fig.6

Unfasten the locking screw of the cable clamp (A) present underneath the lamp base (B).

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.



ROMEO MOON F F6109000

EN

## RF04169

E27 LAMP HOLDER



Fig.7

Unfasten the two screws (N) and lift up the lamp holder assembly (O) with his bracket.

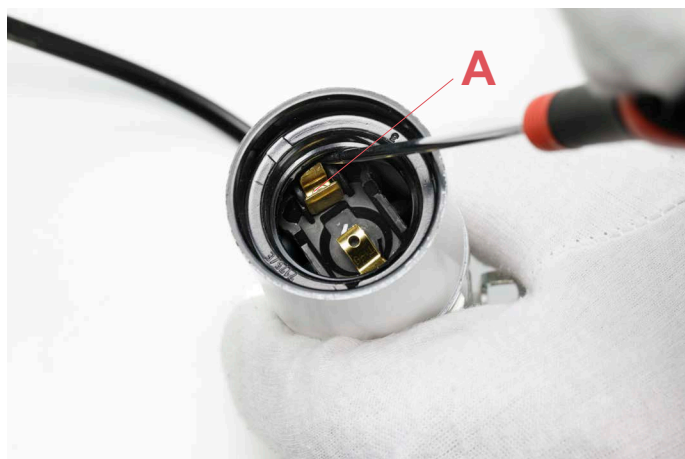


Fig.8

Push down the brass hook (A).

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

ROMEO MOON F F6109000

EN

## RF04169

E27 LAMP HOLDER

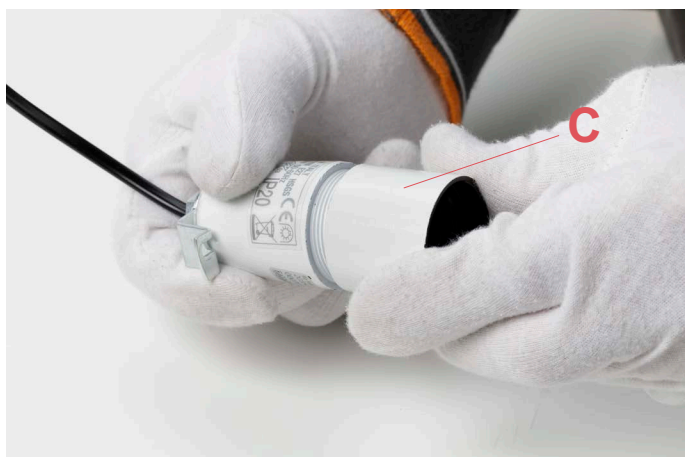


Fig.9

Unfasten the sleeve (C) of the lamp holder.

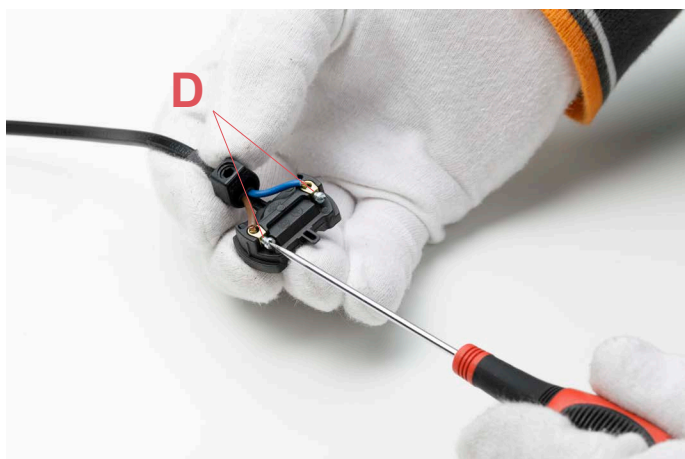


Fig.10

Disconnect the electrical conductors (D) from the terminals of the lamp holder contacts.

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - [www.flos.com](http://www.flos.com)  
Flos reserves the right to introduce any changes to its own models, without prior notice.

## RF04169

E27 LAMP HOLDER

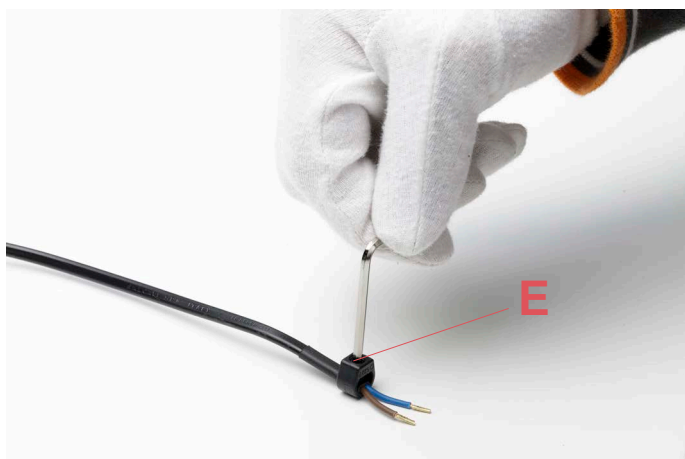


Fig.11

Unfasten the screw of the cable clamp (E) and slide it off from the electrical cable.



Fig.12

Slide off the isolator (F) from the electrical cable.

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

## RF04169

E27 LAMP HOLDER

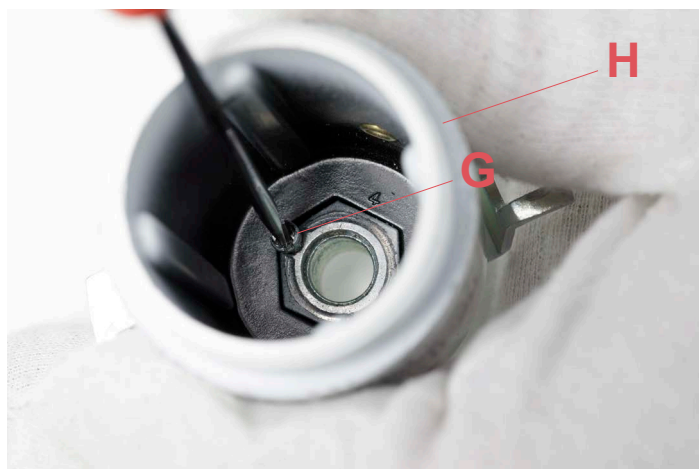


Fig.13

Unfasten the internal screw (G) of the lamp holder support (H).

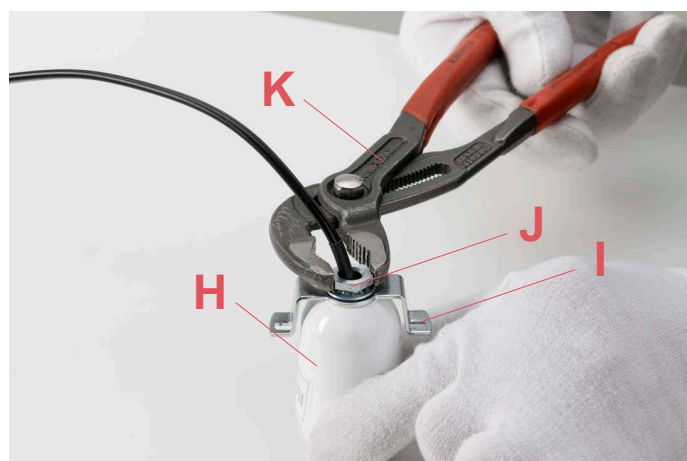


Fig.14

Remove the lamp holder support (H) from the bracket (I) by unfastening the nut (J) with a pair of adjustable pliers (K).

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

## RF04169

E27 LAMP HOLDER



Fig.15

Assemble now the new spar-part:

Fasten the new lamp holder support (H) on the threaded pin (L).

Fasten it well by fastening the nut (J) with the adjustable plier (K).

Fasten the internal screw (G) present inside the lamp holder support (H). Slide through the electrical cable the isolator (F) and position it inside the lamp holder support (H).(Fig.12-13 page 27-28)

Insert the cable clamp (E) and fasten the locking screw.

Connect the electrical wires (D) to the terminals of the lamp holder contacts respecting the polarities (L = Brown – N = Blue).(Fig.10-11)

Fasten the sleeve (C) on the lamp holder support and push the brass hook (A) back in a way that it hooks on to the sleeve (C). (Fig.8-9 page 26-27)

Assemble the lamp holder (O) with bracket, by fastening the two locking screws (N).(Fig.7 page 25)

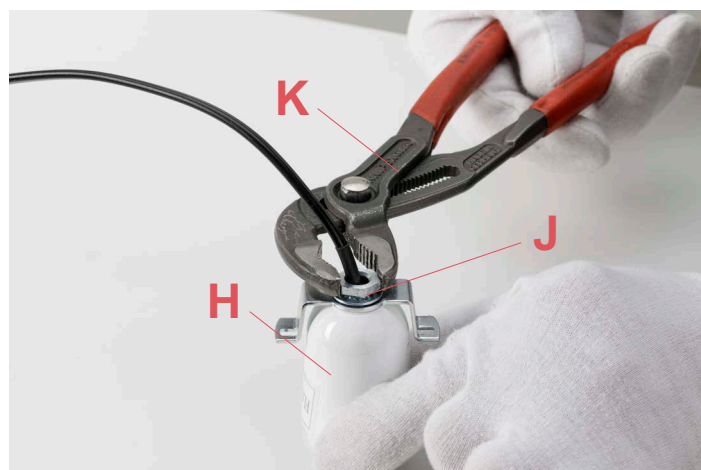


Fig.16

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

## RF04169

E27 LAMP HOLDER

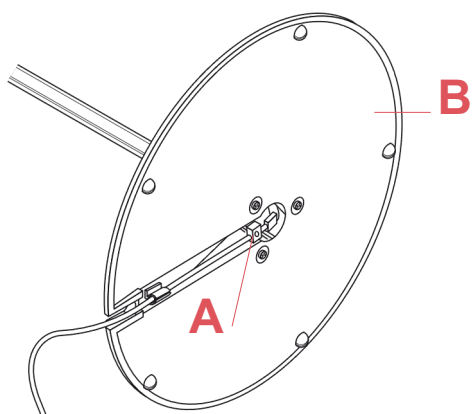


Fig.17

Fasten the screw of the cable clamp (A) present underneath the base (B). (Fig.17)

Rest the support ring (D) on the support brackets (E) and lock it by fastening it with the screw/pivots (F). (Fig.5 page 24)

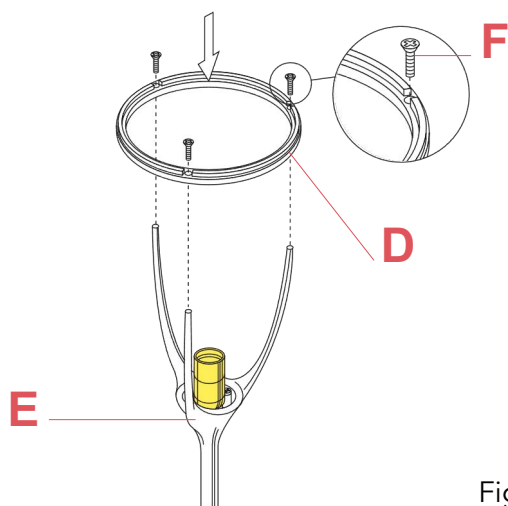


Fig.18

Insert the diffuser (H). (Fig.4 page 23)

Insert the lamp-bulb (I). (Fig.3 page 23)

Position the fabric lamp shade (N) on the support ring (D) ensuring to insert the hook threaded screws (R) into the apposite holes present in the support ring (D), fasten the small bolts (Q).


Collocate the silicone seats in there apposite holes underneath the cover ring (O). Rest the covering ring (O) on the pins (G). (Fig.1-2 page 22)

ROMEO MOON F F6109000

EN

## RF02812

GREY SUPPORT BRACKET



Romeo  
Moon F  
p.31



Romeo  
Soft F  
p.21

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - [www.flos.com](http://www.flos.com)  
Flos reserves the right to introduce any changes to its own models, without prior notice.

ROMEO MOON F F6109000

EN

## RF02812

GREY SUPPORT BRACKET

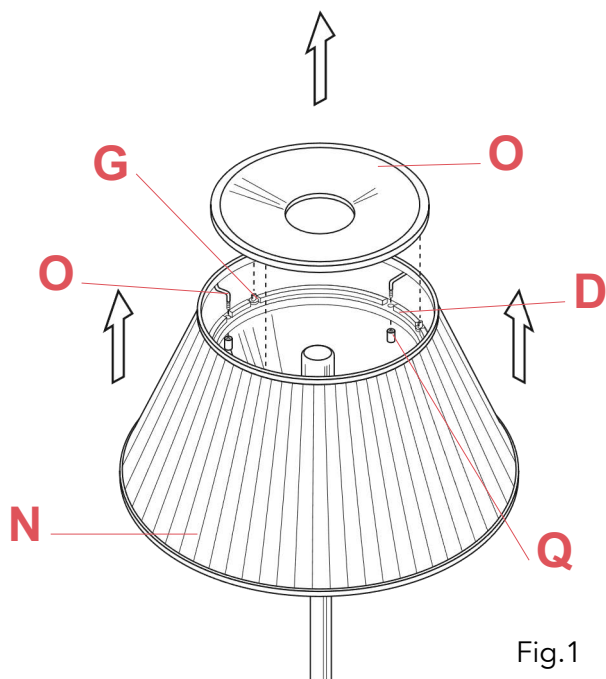


Fig.1

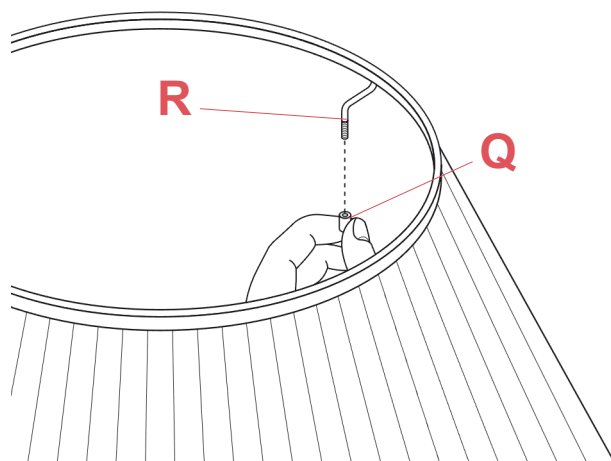


Fig.2

Remove the cover ring (O).  
Remove the fabric lamp shade (N) by unfastening the small bolts (Q).  
Unhook the fabric shade from the support ring (D).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - [www.flos.com](http://www.flos.com)  
Flos reserves the right to introduce any changes to its own models, without prior notice.



ROMEO MOON F F6109000

EN

## RF02812

GREY SUPPORT BRACKET

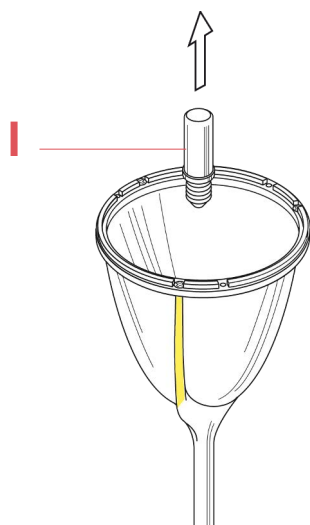


Fig.3

Remove the lamp-bulb (I) if still present on the lamp device.

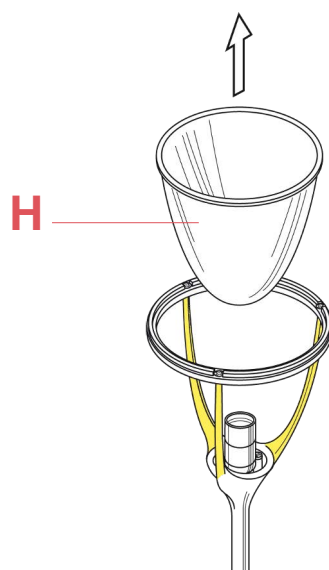


Fig.4

Remove the diffuser (H).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - [www.flos.com](http://www.flos.com)  
Flos reserves the right to introduce any changes to its own models, without prior notice.

## RF02812

GREY SUPPORT BRACKET

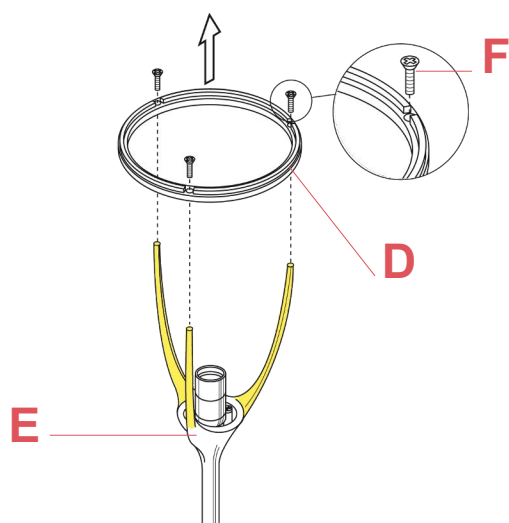


Fig.5

Remove the support ring (D) from the support brackets (E) by unfastening the screw/pivot.

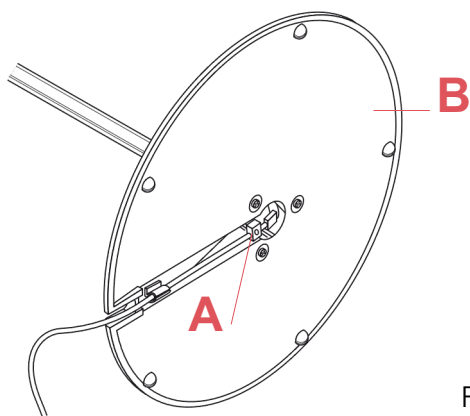


Fig.6

Unfasten the locking screw of the cable clamp (A) present underneath the lamp base (B).

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

ROMEO MOON F F6109000

EN

## RF02812

GREY SUPPORT BRACKET



Fig.7

Unfasten the two screws (N) and lift up the lamp holder assembly (O) with his bracket.

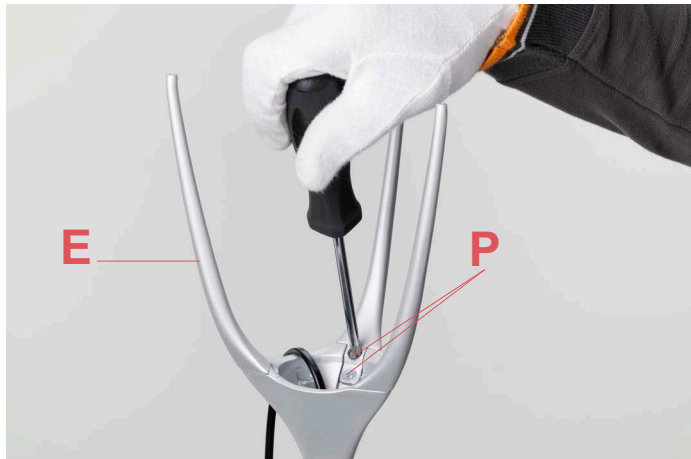


Fig.8

Unfasten the two locking screws (P) and remove the damaged support bracket (E).

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - [www.flos.com](http://www.flos.com)  
Flos reserves the right to introduce any changes to its own models, without prior notice.

ROMEO MOON F F6109000

EN

## RF02812

GREY SUPPORT BRACKET



Fig.9



Fig.10

Assemble now the new spare-part:

Collocate the new support bracket (E), ensuring that the holes (Q) present on the bracket correspond with the holes (R) present on the lamp cup (O).

Assemble the support bracket (E) by fastening the two screws (P).

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

## RF02812

### GREY SUPPORT BRACKET

Assemble now the new spare-part:

Collocate the new support bracket (E), ensuring that the holes (Q) present on the bracket correspond with the holes (R) present on the lamp cup (O).

Assemble the support bracket (E) by fastening the two screws (P).

Assemble the lamp holder (O) with bracket, by fastening the two locking screws (N).

Fasten the screw of the cable clamp (A) present underneath the base (B). (Fig.6 page 34)

Rest the support ring (D) on the support brackets (E) and lock it by fastening it with the screw/pivots (F). (Fig.5 page 34)

Insert the diffuser (H). (Fig.4 page 33)

Insert the lamp-bulb. (Fig.3 page 33)

Position the fabric lamp shade (N) on the support ring (D) ensuring to insert the hook threaded screws (R) into the apposite holes present in the support ring (D), fasten the small bolts (Q).

Collocate the silicone seats in there apposite hole underneath the cover ring (O). Rest the covering ring (O) on the pins (G). (Fig.1-2 page 32)



Fig.9



Fig.10

ROMEO MOON F F6109000

EN

## RF28045

LED 220/240V 40-250W 4-100W RONDÒ DIMMER



Bibliothèque  
Nationale  
p.05



Glo-ball  
F1  
p.05



Glo-ball  
F2  
p.05



Glo-ball  
F3  
p.05



Ic F1  
p.05



Ic F2  
p.05



Ktribe  
F2  
p.05



Ktribe  
F3  
p.05



Lounge  
Gun  
p.13



Luminator  
Dim  
p.05



Parentesi D  
p.32



Ray  
F1  
p.17



Ray F2  
p.17




Romeo  
Moon F  
p.44



Romeo  
Soft  
p.33



Spun  
Light F  
p.09



Toio  
Led  
p.38

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

ROMEO MOON F F6109000

EN

## RF28045

LED 220/240V 40-250W 4-100W RONDÒ DIMMER



Fig.1



Fig.2

Open the box of the damaged dimmer.

For the opening, it is necessary to remove the rubber pad from underneath the dimmer box (refer to fig.1);

Unfasten the screw that locks the triangle terminal cover (refer to fig.2);

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - [www.flos.com](http://www.flos.com)  
Flos reserves the right to introduce any changes to its own models, without prior notice.

ROMEO MOON F F6109000

EN

## RF28045

LED 220/240V 40-250W 4-100W RONDÒ DIMMER

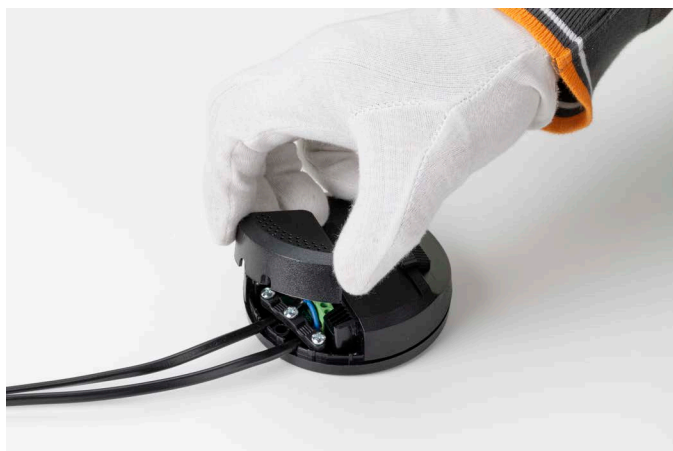


Fig.3

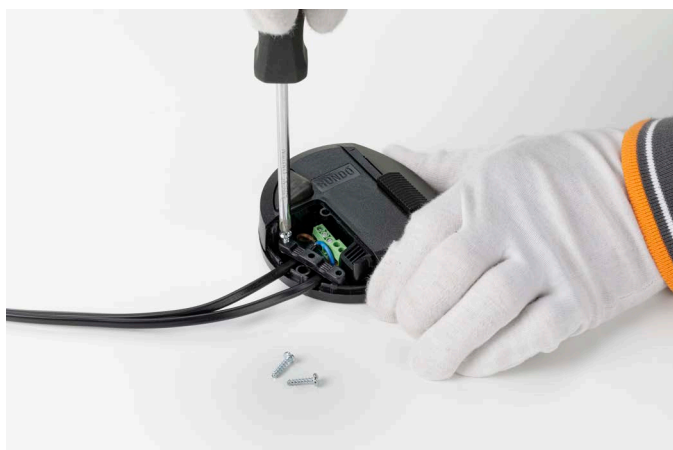


Fig.4

Turn the dimmer box and remove the terminal cover (refer to fig. 3);

Unfasten the three screws of the cable clamps (refer to fig. 4);

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - [www.flos.com](http://www.flos.com)  
Flos reserves the right to introduce any changes to its own models, without prior notice.



ROMEO MOON F F6109000

EN

## RF28045

LED 220/240V 40-250W 4-100W RONDÒ DIMMER



Fig.5

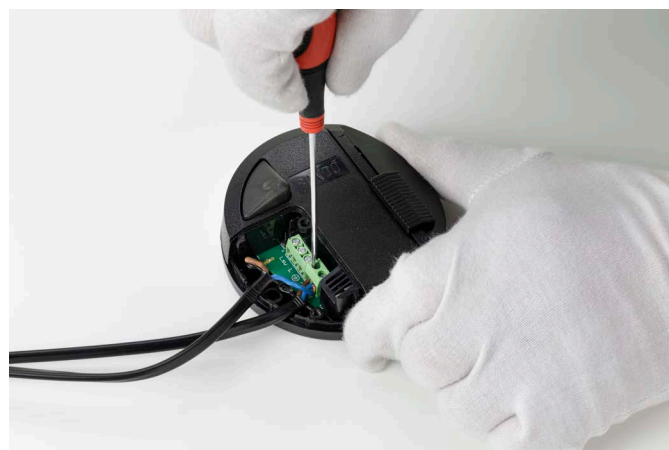


Fig.6

Remove the cable clamp (refer to fig. 5) and disconnect the cables from the green terminal box (refer to fig. 6).

Assemble now the new dimmer:

Connect the cables respecting the polarities, lock the wires by positioning the cable clamp and then fasten the three screws, cover the green terminal box with the triangle cover, turn the dimmer box, fasten the screw and stick-on the rubber pads.

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - [www.flos.com](http://www.flos.com)  
Flos reserves the right to introduce any changes to its own models, without prior notice.