

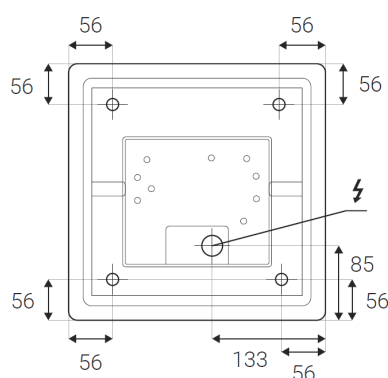


SOLO, A HF

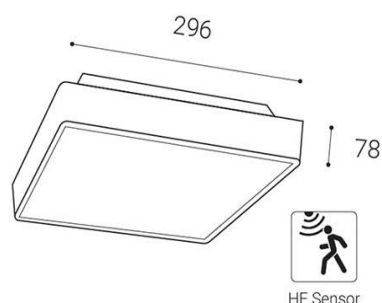

Name	SOLO, A HF
Code	5200254
Color	ANTRACITE
Category	CEILING
Power	16W ± 10 %
Lumen output	1100lm ± 10 %
Color temperature	3000K/4000K/6500K
Efficacy	69lm/W
Driver	500 mA
Electrical insulation class	
Voltage/frequency	220-240V/50-60Hz

Color Rendering Index	80+
SDCM	< 3
Light beam angle	160°
Unified Glare Rating	N/A
Light source	LED
Dimmable	ON REQUEST
LED Lifetime	L80 B20 30.000h 25°C
Warranty	5 YEAR

Ingress Protection	IP 65
Material	ABS/PC

EN

Outdoor square surface mounted light fitting equipped with SMD LED and microwave motion sensor. Housing and diffuser made of polycarbonate. Available in anthracite color. Application: general outdoor lighting (entrance, terrace, stairs)

CZ

Venkovní čtvercové svítidlo na povrch. Světelný zdroj - SMD LED a mikrovlnný snímač pohybu. Svítidlo a difúzor jsou vyrobeny z polykarbonátu. K dispozici v antracitové barvě. Použití: obecné venkovní osvětlení (vchod, terasa, schody)

Product

SOLO, A HF

5200254

ANTRACITE

CEILING

Power

16W ± 10 %

1100lm ± 10 %

3000K/4000K/6500K

69lm/W

500 mA



220-240V/50-60Hz

Information

80+

< 3

160°

N/A

LED

ON REQUEST

L80 B20 30.000h 25°C

5 YEAR

Other data

IP 65

ABS/PC

DE

Quadratische Aufbauleuchte für den Außenbereich mit SMD-LED und Mikrowellen-Bewegungssensor. Gehäuse und Diffusor aus Polycarbonat. Erhältlich in Anthrazit. Anwendung: allgemeine Außenbeleuchtung (Eingang, Terrasse, Pergola)

SK

Vonkajšie hranaté svetidlo. Svetelný zdroj - SMD LED a mikrovlnný pohybový senzor. Svetidlo aj difúzor sú vyrobené z polykarbonátu. K dispozícii v antracitovej farbe. Použitie: všeobecné vonkajšie osvetlenie (vchod, terasa, schodiská)