


Sensor-switched outdoor light

# L 15

white

EAN 4007841 617912



<b>max.60w</b>									<b>3 JAHRE</b> HERSTELLER GARANTIE steinel.de/garantie
max. 60 W E27	infrared sensor 180°	max. 10 m	IP44	90° vertical	2 - 2000 lux	8 sec - 35 min	ideal 2 m	energy saving	manufacturer's warranty steinel.de/garantie

## Function description

The good old days. Classic outdoor SensorLight L 15, ideal for building fronts and entrances, 180° angle of coverage, reach up to 10 m, selectable time and twilight threshold, sensor tilts through 90° for exact adjustment of the detection zone.

## Technical specifications

Dimensions (L x W x H)	240 x 190 x 410 mm
Mains power supply	230 – 240 V / 50 Hz
Mounting height max.	3,00 m
Sensor Technology	passive infrared
Output	60 W
Interconnection	No
Slave modeselectable	No
With lamp	No
Lamp	All-purpose lamp
Base	E27
With motion detector	Yes
Detection angle	180 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	r = 3 m (14 m <sup>2</sup> )

Reach, tangential	r = 10 m (157 m <sup>2</sup> )
Photo-cell controller	Yes
Twilight setting	2 – 2000 lx
Time setting	8 s – 35 Min.
Basic light level function	No
Soft light start	No
Impact resistance	IK03
IP-rating	IP44
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Plastic
Cover material	Plastic, transparent
Manufacturer's Warranty	3 years
Settings via	Potentiometers
Cover material	sticker
Version	white
PU1, EAN	4007841617912

Sensor-switched outdoor light


# L 15

white

EAN 4007841 617912



## Detection Zone

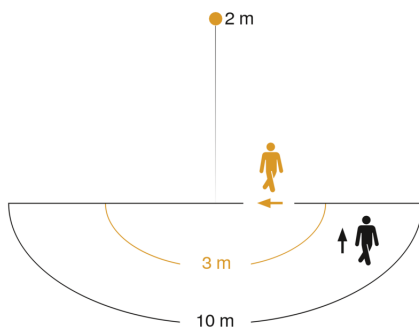

Mögliche Montagehöhe: 1,80 m – 3,00 m

Orange: radial

Schwarz: tangential

## Dimension Drawing

