


Sensor-switched outdoor light

L 585 S

white

EAN 4007841 005917



max.60w									3 JAHRE HERSTELLER GARANTIE steinel.de/garantie
max. 60 W E27	infrared sensor 180°	max. 10 m	IP44	70° vertical	2 - 2000 lux	8 sec - 35 min	ideal 2 m	energy saving	manufacturer's warranty steinel.de/garantie

Function description

Individualist all round. Outdoor SensorLight L 585 S, ideal for building fronts and entrances, 180° angle of coverage, reach up to 10 m, selectable time and twilight threshold, sensor tilts through 70° for exact adjustment of the detection zone.

Technical specifications

Dimensions (L x W x H)	229 x 215 x 312 mm	Reach, tangential	r = 10 m (157 m ²)
Mains power supply	230 – 240 V / 50 Hz	Photo-cell controller	Yes
Mounting height max.	3,00 m	Twilight setting	2 – 2000 lx
Sensor Technology	passive infrared	Time setting	8 s – 35 Min.
Output	60 W	Basic light level function	No
Interconnection	No	Soft light start	No
Slave modeselectable	No	Impact resistance	IK03
With lamp	No	IP-rating	IP44
Lamp	All-purpose lamp	Protection class	II
Base	E27	Ambient temperature	-20 – 40 °C
With motion detector	Yes	Housing material	Plastic
Detection angle	180 °	Cover material	Glass transparent
Sneak-by guard	Yes	Manufacturer's Warranty	3 years
Capability of masking out individual segments	Yes	Settings via	Potentiometers
Electronic scalability	No	Cover material	sticker
Mechanical scalability	No	Version	white
Reach, radial	r = 3 m (14 m ²)	PU1, EAN	4007841005917

Accessories

EAN 4007841 003548 Replacement glass shade for L 70X/590/535/560/585

Sensor-switched outdoor light


L 585 S

white

EAN 4007841 005917



Detection Zone

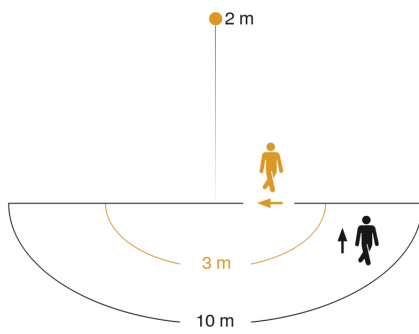

Mögliche Montagehöhe: 1,80 m – 3,00 m

Orange: radial

Schwarz: tangential

Dimension Drawing

