


# XLED CAM 1

EAN 4007841 065294



**LED**

long life LED  
50.000 h



3000K  
warm-white



infrared sensor  
180°



max. 10 m



2,4 GHz Wi-Fi



Camera



Intercom system



inclusive



IP44



60° vertical, 128°  
horizontal

## Function description

Security the smart way. Sensor-switched floodlight XLED CAM 1 (3000 K, 2200 lm, 21 W) with 180° infrared motion sensor and 10 m reach, swivelling HD wide-angle colour camera and intercom system. Delivers excellent surveillance images directly to the mobile device. Includes 8 GB SD card for storing the surveillance images. Free app for iOS and Android.

## Technical specifications

Dimensions (L x W x H)	167 x 210 x 275 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Mounting height max.	2,00 m
Sensor Technology	passive infrared
Output	21 W
Interconnection	No
Luminous flux	2200 lm
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index CRI	80-89
With lamp	Yes, LED lamp
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection angle	180 °
Angle of aperture	45 °
Sneak-by guard	No
Capability of masking out individual segments	No
Reach, radial	r = 2 m (6 m <sup>2</sup> )

Reach, tangential	r = 10 m (157 m <sup>2</sup> )
Photo-cell controller	Yes
Twilight setting	10 – 10000 lx
Time setting	60 s – 15 Min.
Basic light level function	Yes
Basic light level function time	all night
Main light adjustable	30 - 100 %
Functions	intercom system, Camera
Settings via	Wi-Fi
Soft light start	No
Continuous light	selectable
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Ambient temperature	-10 – 40 °C
Housing material	Aluminium
Cover material	Glass transparent
Manufacturer's Warranty	3 years
PU1, net weight	1,471 kg
PU1, EAN	4007841065294


Sensor-switched LED floodlight

# XLED CAM 1

EAN 4007841 065294



## Detection Zone

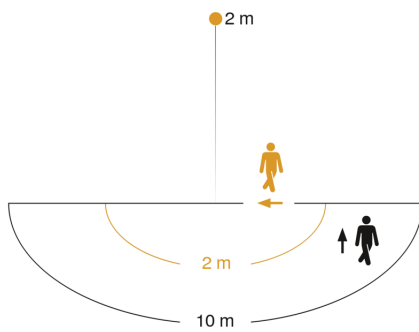

Mögliche Montagehöhe: 1,80 m – 2,00 m  
Orange: radial  
Schwarz: tangential

## Dimension Drawing

