




Wall Lights | 220-240 V  
176 stripLED 23 W DC - 28 W AC | CRI 90  
8886

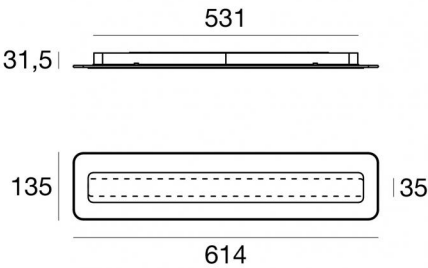

| Technical data                                 |                       |
|--|-----------------------|
| Type   | Surface               |
| Installation position                          | Wall lights - Ceiling |
| Installation environment                       | Indoor                |
| Light Source                                   | LED                   |
| Total Power                                    | 28 W                  |
| Source lumens                                  | 3363 lm               |
| Voltage  | 220 - 240 V AC        |
| Frequency                                      | 60 - 50 Hz            |
| CCT / Tone                                     | 3000 K                |
| Colour rendering index                         | 90 Ra                 |
| C.C. / C.V.                                    | AC                    |
| Safety class                                   | 1                     |
| IP   | IP20                  |
| Glow wire test                                 | 850°                  |
| Direct mounting on normally flammable surfaces | Yes                   |
| CE   | Yes                   |
| Driver included                                | Driver                |
| Dimmable article                               | No                    |
| Directional                                    | No                    |
| Tilting  | No                    |
| Walk-over                                      | No                    |
| Drive-over                                     | No                    |
| Cable included                                 | No                    |
| Resin potting                                  | No                    |
| Type of light emission                         | Double emission       |
| Net weight                                     | 1,885 Kg              |
| Electrostatic discharge protection             | No                    |
| Surge protection                               | No                    |

| Finishing casing         |                         |
|--------------------------|-------------------------|
| Material                 | Iron                    |
| Colour                   | chrome                  |
| Processing               | Electroplating          |
| Finishing diffuser       |                         |
| Material                 | Glass                   |
| Colour                   | transparent             |
| Processing               | Sandblasting            |
| Finishing mounting frame |                         |
| Material                 | Iron                    |
| Colour                   | Embossed white RAL 9003 |
| Processing               | Coating                 |

Wall Lights | 220-240 V | 176 stripLED 23 W DC - 28 W AC | CRI 90 | Base 8886


Double emission wall lights for indoor application. The warm white LED light source with a diffused light distribution is composed of 176 stripled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3363 lm, with a 146.2 lm/W nominal luminous efficacy.

The device body is made of iron and features a chrome finish, processed by means of electroplating; the diffuser is made of glass with a sandblasting treatment; the mounting frame is made of iron, with an embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 1,885 kg.

The total absorbed power is 28 W.

The device features protection class I and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

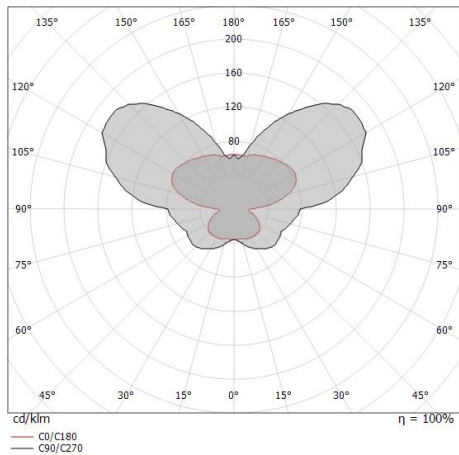

| Energy efficiency class   |  |
|---|--|
| This product contains 2 light sources of energy efficiency class D. |  |

| Illuminotechnical Features              |                |
|---|----------------|
| Light Output Ratio (LOR)                | 86 %           |
| Source lumens                           | 3363 lm        |
| Delivered lumens                        | 2912 lm        |
| Consumption                             | 28 W           |
| Luminaire efficacy                      | 104 lm/W       |
| Colour temperature                      | 3000 K         |
| Standard Deviation of Colour Matching   | 3 Step MacAdam |
| Colour rendering index                  | 90 Ra          |
| Junction temperature (lighting fixture) | 80             |
|   |                |
| Standard Operating Ambient Temperature  | 25°C           |

| LED Life / Failure Ratio |  |
|--------------------------|--|
| L70 B20 C0 72500h        |  |

| UGR               |          |
|-------------------|----------|
| UGR axial         | 14.4     |
| UGR transversal   | 12.6     |
| X=4H   Y=8H       | S=0.25H  |
| Reflection factor | 70/50/20 |

| OPTICAL                     |                     |
|-----------------------------|---------------------|
| C90/C270 optics             | 180°                |
| C0/C180 optics              | 159°                |
| Light distribution simmetry | Symmetrical 2 assis |