


Pendant Luminaires | 220-240 V  
234 topLED 25 W DC - 27 W AC | CRI 90  
**9195**

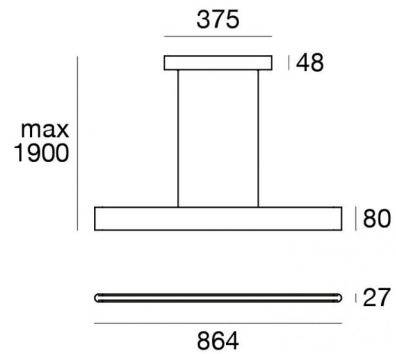

Technical data	
Type	Pendant Luminaires
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Double Diffused
Light emission direction	downward and upward
Nominal power	25 W DC
Total Power	27 W
Source lumens	4462 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	220 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	DALI-2 - PUSH DIM
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	2.2 m
Resin potting	No
Type of light emission	Double emission
Net weight	2.6 Kg
Electrostatic discharge protection	Yes
Surge protection	Yes

#### Finishing Finishing casing

Material	Aluminium
Colour	Text white (R9003)
Processing	Coating

#### Finishing Finishing diffuser

Material	PC
Colour	opaline

#### Finishing Finishing mounting frame

Material	Aluminium
Colour	Text white (R9003)
Processing	Coating

#### Cables Electrification+suspension

Max cable length	2200 mm
------------------	---------

Pendant Luminaires | 220-240 V | 234 topLED 25 W DC - 27 W AC | CRI 90 | Base  
**9195**

Double emission pendant luminaires for indoor application. The warm white LED light source with a double diffused light distribution is composed of 234 toplLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 4462 lm, with a 178.5 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a text white (r9003) finish, processed by means of coating; the diffuser is made of PC; the mounting frame is made of aluminium, with a text white (r9003) finish, processed by means of coating.

The ingress protection degree is IP20; the total weight is of 2.6 kg.

The total absorbed power is 27 W The power supply cable is included and features a 2.2 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains 5 light sources of energy efficiency class D.

### Illuminotechnical Features

Light Output Ratio (LOR)	56 %
Source lumens	4462 lm
Delivered lumens	2502 lm
Consumption	27 W
Luminaire efficacy	92 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

### LED Life / Failure Ratio


L70 B20 C0 72500h

### UGR

UGR axial	22.1
UGR transversal	26.7
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

C90/C270 optics	103°
C0/C180 optics	129°
Light distribution symmetry	Symmetrical 2 axis

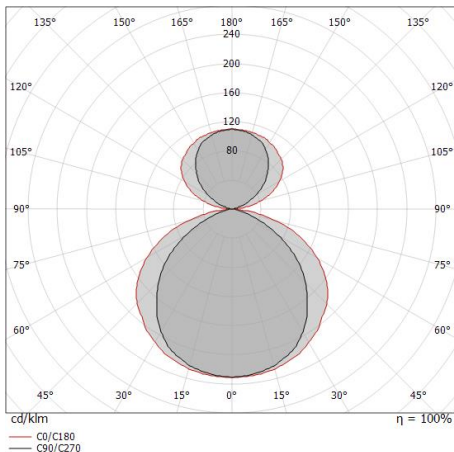

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	1.26 2.12	E(0°) 2312 E(C90) 279 E(C0) 90
1.0	2.51 4.23	E(0°) 578 E(C90) 70 E(C0) 23
1.5	3.77 6.35	E(0°) 257 E(C90) 31 E(C0) 10
2.0	5.03 8.46	E(0°) 144 E(C90) 17 E(C0) 6
2.5	6.29 10.58	E(0°) 92 E(C90) 11 E(C0) 4
3.0	7.54 12.69	E(0°) 64 E(C90) 8 E(C0) 3

— C0/C180 (Half-peak divergence: 129.4°)  
— C90/C270 (Half-peak divergence: 103.0°)