


Antigua_FL



Floor Lamp | 220-240 V
96 stripLED 32 W DC - 39 W AC | CRI 90
9316

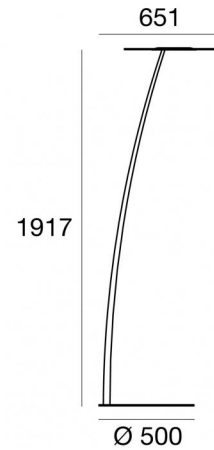

Technical data	
Construction year	2020
Type	Floor Lamp
Installation position	Floor
Installation environment	Indoor
Light Source	LED
Total Power	39 W
Source lumens	2796 lm
Voltage	220 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	PUSH DIM
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	3 m
Resin potting	Yes
Type of light emission	Double emission
Electrostatic discharge protection	No
Surge protection	No

Finishing casing

Material	Iron
Colour	Embossed black RAL 9005
Processing	Coating

Finishing diffuser

Material	Glass
Colour	transparent
Processing	Sandblasting

Finishing mounting frame

Material	Iron
Colour	Embossed black RAL 9005
Processing	Coating



Floor Lamp | 220-240 V | 96 stripLED 32 W DC - 39 W AC | CRI 90 | Base 9316

Double emission floor lamp for indoor application. The warm white LED light source with a diffused light distribution is composed of 96 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2796 lm, with a 87.4 lm/W nominal luminous efficacy.

The device body is made of iron and features a embossed black ral 9005 finish, processed by means of coating; the diffuser is made of glass with a sandblasting treatment; the mounting frame is made of iron, with a embossed black ral 9005 finish, processed by means of coating. The ingress protection degree is IP20;

The total absorbed power is 39 W. The power supply cable is included and features a 3 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	71 %
Source lumens	2796 lm
Delivered lumens	2000 lm
Consumption	39 W
Luminaire efficacy	51 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80

Standard Operating Ambient Temperature 25°C

LED Life / Failure Ratio

L70 B20 C0 72500h (at Tj 115 Ta 25)

OPTICAL

C0/C180 optics	180°
Light distribution simmetry	Symmetrical

