


Box_W2 Bi Emission



Wall Lights | 220-240 V
1 topLED 9 W DC - 10 W AC | CRI 80

9533



| Technical data | |
|--|-----------------|
| Designer | Linea Light |
| Construction year | 2020 |
| Type | Wall Lights |
| Installation position | Wall lights |
| Installation environment | Indoor |
| Light Source | LED |
| Total Power | 10 W |
| Source lumens | 1092 lm |
| Voltage | 220 - 240 V AC |
| Frequency | 60 - 50 Hz |
| CCT / Tone | 3000 K |
| Colour rendering index | 80 Ra |
| C.C. / C.V. | AC |
| Safety class | 1 |
| IP | IP40 |
| Glow wire test | 650° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| Driver included | Driver |
| Dimmable article | Phase cut |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | No |
| Resin potting | No |
| Type of light emission | Double emission |
| Net weight | 0.55 Kg |
| Electrostatic discharge protection | No |
| Surge protection | No |

| Finishing casing | |
|--------------------------|-----------------|
| Material | Brass |
| Finishing diffuser | |
| Material | PMMA |
| Colour | opaline |
| Processing | Satin finishing |
| Finishing mounting frame | |
| Material | Aluminium |
| Colour | white |
| Processing | Coating |

Box_W2 Bi Emission



Wall Lights | 220-240 V | 1 topLED 9 W DC - 10 W AC | CRI 80 | Base 9533

Double emission wall lights for indoor application. The warm white LED light source with a diffused light distribution is composed of 1 topped LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 1092 lm, with a 121.3 lm/W nominal luminous efficacy.

The device body is made of brass; the diffuser is made of pmma with a satin finishing treatment; the mounting frame is made of aluminium, with a white finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 0.55 kg.

The total absorbed power is 10 W.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class D.

Illuminotechnical Features

| | |
|---|----------------|
| Light Output Ratio (LOR) | 72 % |
| Source lumens | 1092 lm |
| Delivered lumens | 795 lm |
| Consumption | 10 W |
| Luminaire efficacy | 79 lm/W |
| Colour temperature | 3000 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Colour rendering index | 80 Ra |
| Junction temperature (lighting fixture) | 80 |

Standard Operating Ambient Temperature 25°C

LED Life / Failure Ratio


L70 B20 C0 72500h

UGR

| | |
|-------------------|----------|
| UGR axial | 24.9 |
| UGR transversal | 27.1 |
| X=4H Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

OPTICAL

| | |
|-----------------------------|--------------------|
| C90/C270 optics | 105° |
| C0/C180 optics | 120° |
| Light distribution symmetry | Symmetrical 2 axis |

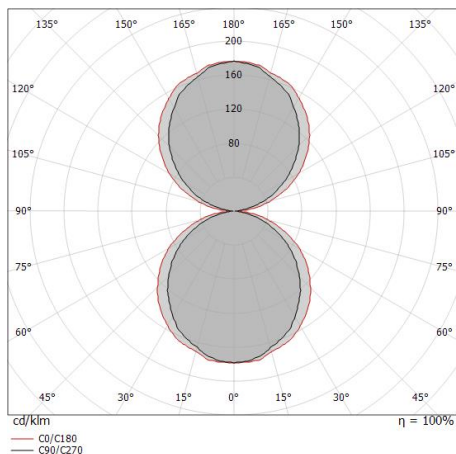

| Distance [m] | Cone diameter [m] | illuminance [lx] | E(0°) | E(C90) | E(C0) |
|--------------|-------------------|------------------|-------|--------|-------|
| 0.5 | 1.30 1.73 | 567 64 35 | 52.5° | 60.0° | |
| 1.0 | 2.61 3.46 | 142 16 9 | 52.5° | 60.0° | |
| 1.5 | 3.91 5.20 | 63 7 4 | 52.5° | 60.0° | |
| 2.0 | 5.21 6.93 | 35 4 2 | 52.5° | 60.0° | |
| 2.5 | 6.52 8.66 | 23 3 1 | 52.5° | 60.0° | |
| 3.0 | 7.82 10.39 | 16 2 1 | 52.5° | 60.0° | |

— C0/C180 (Half-peak divergence: 120.0°)
— C90/C270 (Half-peak divergence: 105.0°)



Box_W2 Bi Emission | Wall Lights | Accessories
9533



Dimmer
220-240V

Code

KIT0026