


Floor Lamp | 100-240 V  
112 topLED 28 W DC - 31 W AC | CRI 90  
**CA057FWHMDD**

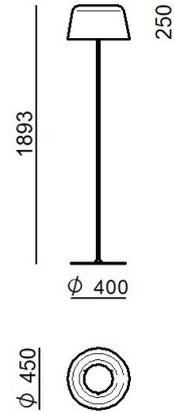

Technical data	
Type	Floor Lamp
Installation position	Floor
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Double Diffused
Light emission direction	downward and upward
Nominal power	28 W DC
Total Power	31 W
Source lumens	3441 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	100 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	2700 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	Phase cut
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Electric socket	Type F
Cable length	4 m
Resin potting	No
Type of light emission	Double emission
Electrostatic discharge protection	Yes
Surge protection	Yes

Finishing casing	
Material	Aluminium
Colour	Text white Ral 9003
Processing	Coating
Finishing diffuser	
Material	Aluminium
Colour	Text white Ral 9003
Processing	Coating

Floor Lamp | 100-240 V | 112 topLED 28 W DC - 31 W AC | CRI 90 | Base  
**CA057FWHMDD**

Double emission floor lamp for indoor application. The super warm white LED light source with a double diffused light distribution is composed of 112 topLED LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 3441 lm, with a 122.9 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a text white ral 9003 finish, processed by means of coating; the diffuser is made of aluminium with a coating treatment. The ingress protection degree is IP20;

The total absorbed power is 31 W. The power supply cable is included and features a 4 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

#### Energy efficiency class

This product contains a light source of energy efficiency class F.

#### Illuminotechnical Features


Light Output Ratio (LOR)	63 %
Source lumens	3441 lm
Delivered lumens	2175 lm
Consumption	31 W
Luminaire efficacy	70 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra

Standard Operating Ambient Temperature	-20 / +50°C
--	-------------

#### LED Life / Failure Ratio

L70 B20 C0 72500h (at Tj 115 Ta 25 )


Delfi\_FL | Floor Lamp | Accessories  
**CA057FWHMDD**



Dimmer - Phase cut (Max 100W) - Essential for dimming the lamp  
220-240V

**Code**

KIT0026



Dimmer - Phase cut CASAMBI - Essential for dimming the lamp with Casambi  
Radio-frequenza, 85-240V

**Code**

KIT0080