
# FLOS


# TATOU F

Designed by Patricia Urquiola, 2012

F7764009



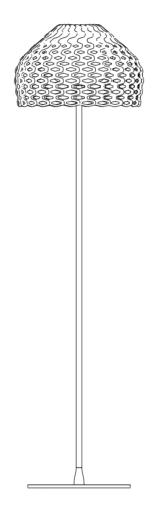

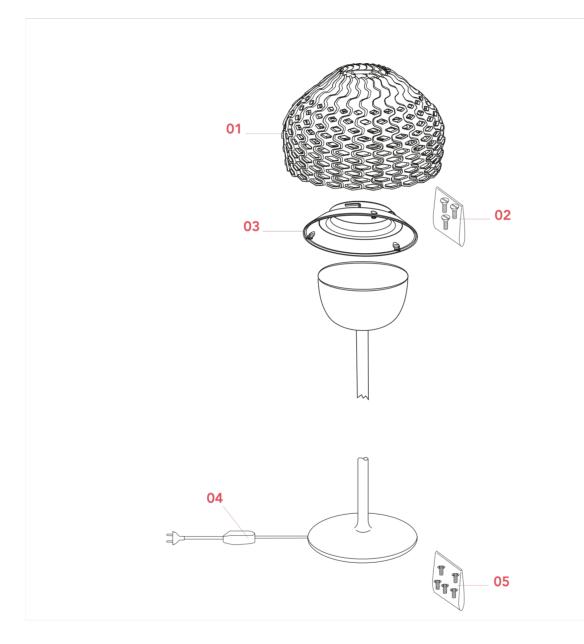

- 01. F7755009 F-S2 white assembly diffuser
- 02. RF7755100 Kit with screws for F-S2 opal reflector assembly
- 03. RF7755200 F-S2 opal reflector assembly
- 04. RF29978 1012S dimmer 100-240V 4-250WHL 4-25W
- 05. RF3020100 Kit of n.5 white feet pads for base

**TATOU F** F7764009

**F7755009** F-S2 WHITE ASSEMBLY DIFFUSER





### **TATOU F** F7764009

F7755009

F-S2 WHITE ASSEMBLY DIFFUSER

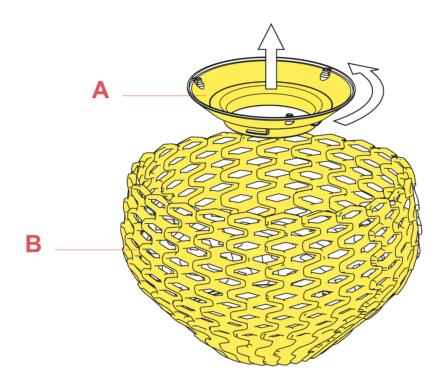


Fig.1

Disassemble the reflector ring (A) from the external diffuser (B) by rotating it slightly anticlockwise.

### **TATOU F** F7764009

F7755009

F-S2 WHITE ASSEMBLY DIFFUSER


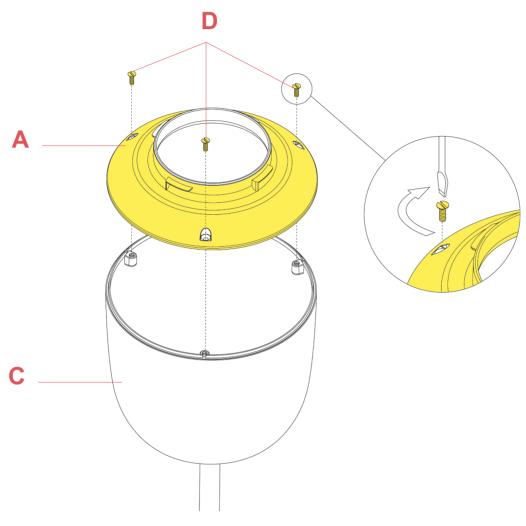



Fig.2

# Assemble the reflector ring (A) onto the internal diffuser (C) with the three screws (D) provided (utilize a flat screwdriver).

**TATOU F** F7764009

F7755009 F-S2 WHITE ASSEMBLY DIFFUSER

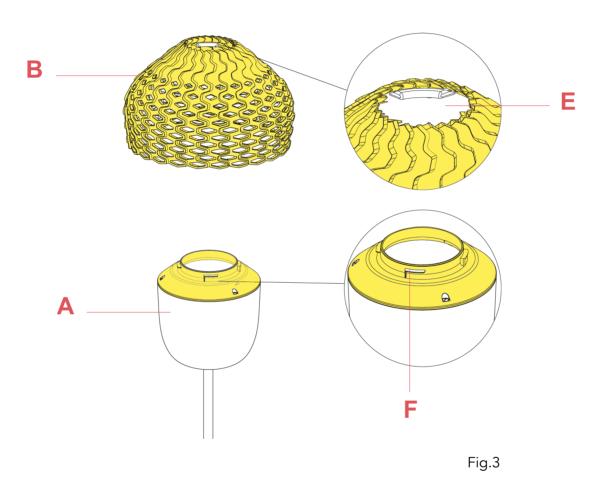




### **TATOU F** F7764009

### RF7755100

KIT WITH SCREWS FOR F-S2 OPAL REFLECTOR ASSEMBLY





### **TATOU F** F7764009

### RF7755100

KIT WITH SCREWS FOR F-S2 OPAL REFLECTOR ASSEMBLY

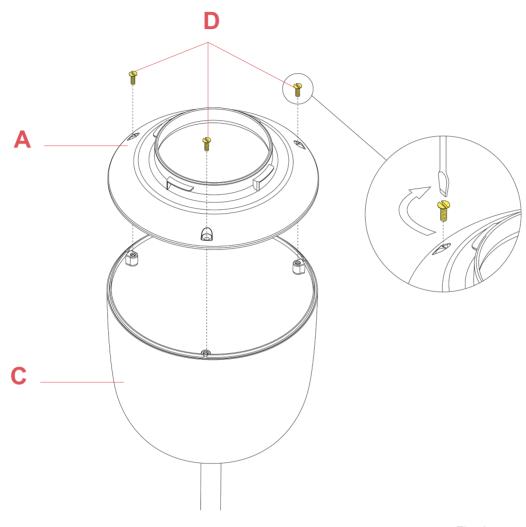



Fig.1

Verify that the lamp-bulb has been removed from the device.

### **TATOU F** F7764009

### RF7755100

KIT WITH SCREWS FOR F-S2 OPAL REFLECTOR ASSEMBLY

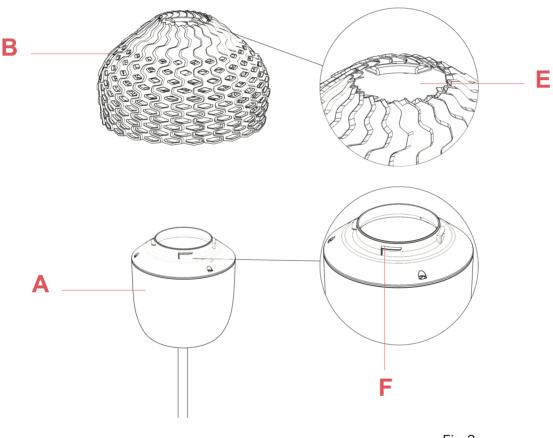




Insert the lamp bulb. Assemble the external diffuser (B) onto the reflector ring (A) being careful to make the three hooks (F) present on the reflector ring (A) correspond with the relative housings (E) present on the external diffuser (B). At this point, lock the external diffuser by rotating it slightly clockwise.

**TATOU F** F7764009

**RF7755200** F-S2 REFLECTOR ASSEMBLY






### **TATOU F** F7764009

RF7755200



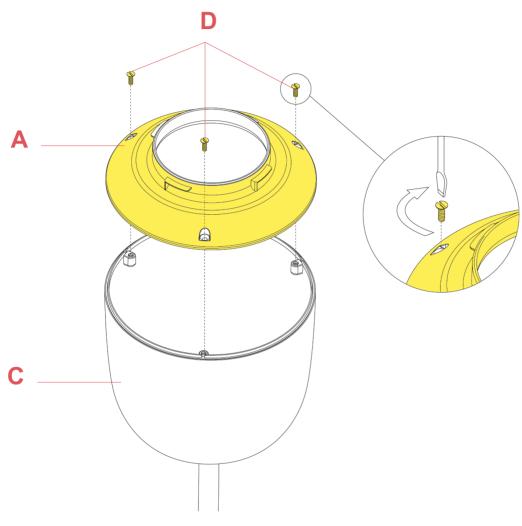




# Assemble the reflector ring (A) onto the internal diffuser (C) with the three screws (D) provided (utilize a flat screwdriver).

**TATOU F** F7764009

**RF7755200** F-S2 REFLECTOR ASSEMBLY

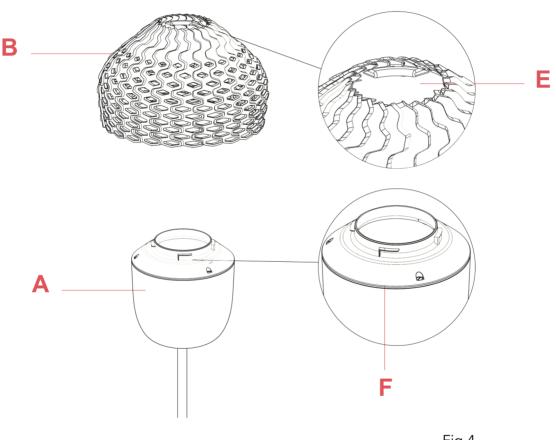



Insert the lamp bulb. Assemble the external diffuser (B) onto the reflector ring (A) being careful to make the three hooks (F) present on the reflector ring (A) correspond with the relative housings (E) present on the external diffuser (B). At this point, lock the external diffuser by rotating it slightly clockwise.

REV. 1 DATE 16/08/2021

EN

**TATOU F** F7764009

### RF29978

1012S DIMMER 100-240V 4-250WHL 4-25W



**TATOU F** F7764009

### RF29978

1012S DIMMER 100-240V 4-250WHL 4-25W




Fig.1



Fig.2

Open the box of the damaged dimmer. Unfasten the fixing screws (A).

Turn the dimmer box and remove the terminal cover.

### **TATOU F** F7764009

### **RF29978**

1012S DIMMER 100-240V 4-250WHL 4-25W



Unfasten the screws of the cable clamp.





Fig.4

Remove the cable white clamp and disconnect the wires from the green terminal box.


Assemble now the new dimmer: Connect the conductors respecting the polarities, lock the cables by positioning the cable clamp and then fasten the screw, cover the green terminal box with the cover, turn the dimmer box, fasten back the screws and stick-on the rubber pads.

### **TATOU F** F7764009

RF3020100

KIT OF N. 5 WHITE FEET PADS FOR BASE



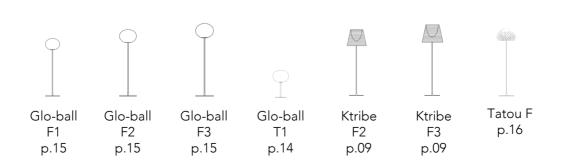

FLOS

REV. 1 DATE 16/08/2021

EΝ

#### **TATOU F** F7764009

### RF3020100

KIT OF N. 5 WHITE FEET PADS FOR BASE



Fig.1

Glue the feet (A) to the base by utilizing glue. We advise to utilize the Loctite 454 glue.