
IC S2


Designed by Michael Anastassiades, 2014

F3176059



EN

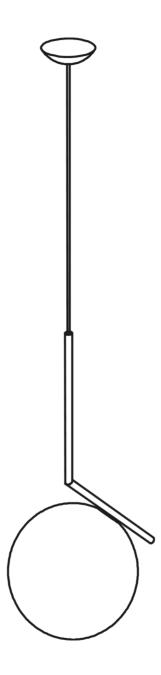

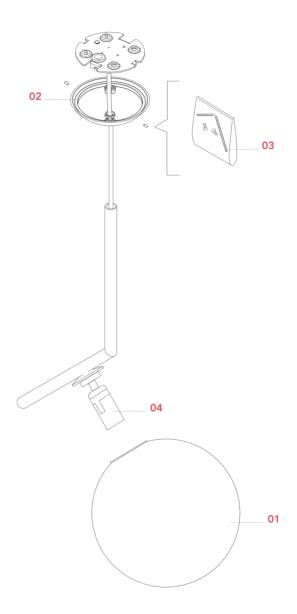

- $\textbf{01. F3137059} \ \text{Glass diffuser S2 assembly for brass version}$
- 02. RF3170359 S1/S2 brass ceiling rose assembly
- 03. RF3160100 Kit with screws and Allen key
- 04. RF3160200 E27 lamp holder assembly

REV. 1 DATE 12/07/2021


EN

IC S2 F3176059

F3137059

GLASS DIFFUSER S2 ASSEMBLY FOR BRASS VERSION



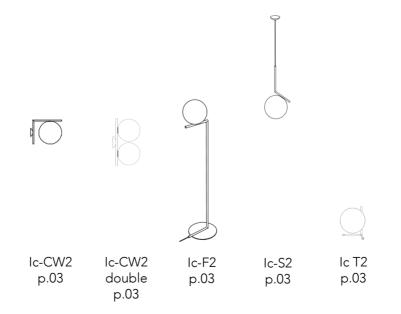

IC S2 F3176059

F3137059

GLASS DIFFUSER S2 ASSEMBLY FOR BRASS VERSION

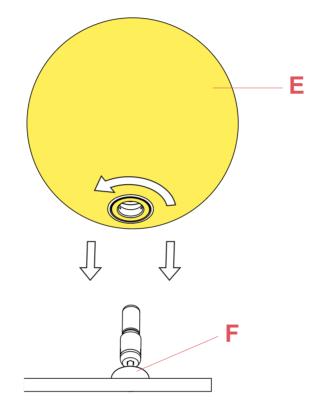


Fig.1

Assemble the glass diffuser (E) by fastening it delicately to the lamp body's ferrule (F).

REV. 1 DATE 12/07/2021


EN

IC S2 F3176059

RF3170359

S1/S2 BRASS CEILING ROSE ASSEMBLY





REV. 1 DATE 12/07/2021

EN

IC S2 F3176059

RF3170359

S1/S2 BRASS CEILING ROSE ASSEMBLY

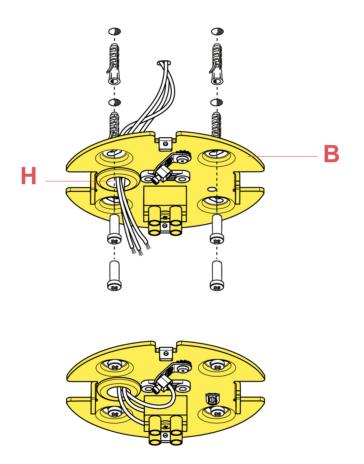


Fig.1

Install the wall fitting (B) to the ceiling with screws and plugs, ensuring that the power wires pass through the hole (H). **REMARKS!!!** Choose screw plugs that are suitable for the type of mounting surface

REV. 1 DATE 12/07/2021

EN

IC S2 F3176059

RF3170359

S1/S2 BRASS CEILING ROSE ASSEMBLY

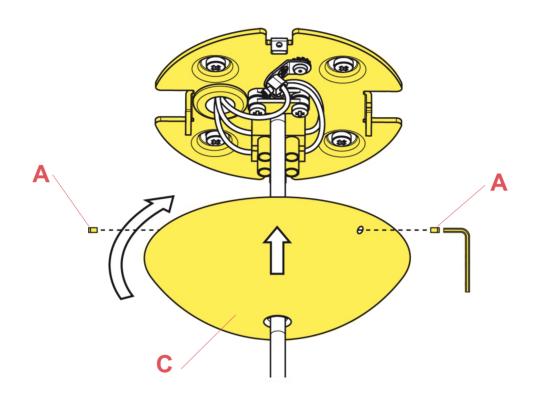


Fig.2

Assemble the ceiling rose on the ceiling attachment by fastening it with a slight clockwise rotation to then lock it by screwing the headless screws (A).

REV. 1 DATE 12/07/2021


EN

IC S2 F3176059

RF3160100

KIT WITH SCREWS AND ALLEN KEY



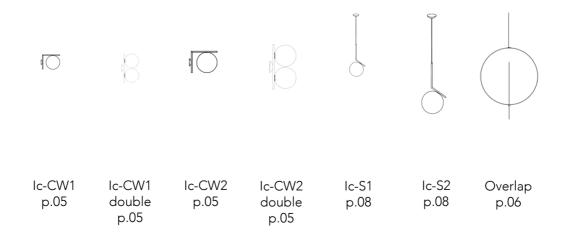

REV. 1 DATE 12/07/2021

EN

IC S2 F3176059

RF3160100

KIT WITH SCREWS AND ALLEN KEY

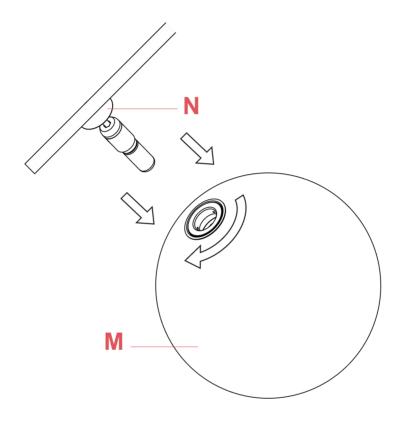


Fig.1

Before proceeding in installing the screws, please verify that the glass diffuser (M) has been removed. If not, please remove to the glass diffuser (M) to avoid possible damages.

REV. 1 DATE 12/07/2021

EΝ

IC S2 F3176059

RF3160100

KIT WITH SCREWS AND ALLEN KEY

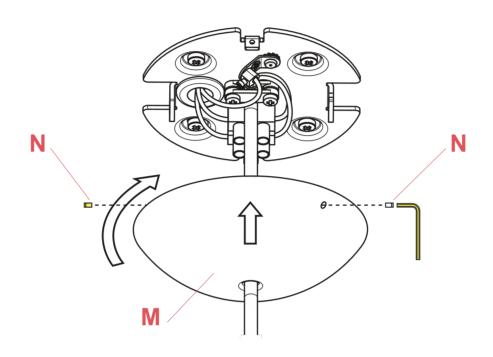


Fig.2

Assemble the ceiling rose on the ceiling attachment by fastening it with a slight clockwise rotation to then lock it by screwing the headless screws (A). Assemble back the glass diffuser (M) by fastening it delicately to the lamp body's ferrule (N). (Fig.1 page 9)

IC S2 F3176059

RF3160200

E27 LAMP HOLDER ASSEMBLY



IC S2 F3176059

RF3160200 E27 LAMP HOLDER ASSEMBLY

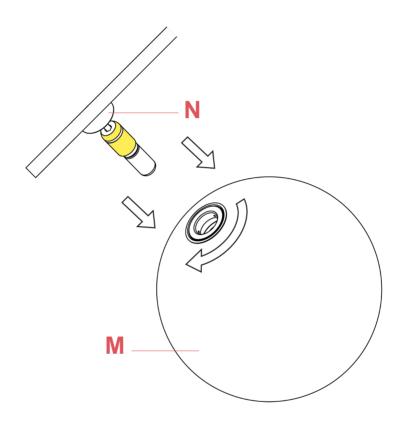


Fig.1

Unfasten the glass diffuser (M) and lamp-bulb from the lamp fixture.

IC S2 F3176059

RF3160200 E27 LAMP HOLDER ASSEMBLY




Fig.2

Fig.3

Unfasten the lamp holder sleeve (B) from the support (C).

By utilizing a tiny flat screw driver, carefully

push towards the inside, the

lateral spring (A) of the lamp holder.

EΝ

IC S2 F3176059

RF3160200 E27 LAMP HOLDER ASSEMBLY




Fig.4



Fig.5

Disconnect the wires from the fitting (E) electrical terminals (D).

Remove the fitting (E) from the support (C) and disconnect the earth wire from the terminal (F).

IC S2 F3176059

RF3160200 E27 LAMP HOLDER ASSEMBLY




Fig.6

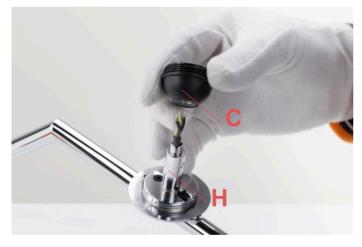


Fig.7

Unfasten the screw (G) and remove the support (C) by unfastening it from the threaded pin (H).

Assemble now the new spare-part:

Fasten the lamp holder support (C) to the threaded pin (H) and lock the support onto the threaded pin (H) by fastening the screw (G). (Fig.6-7)

Connect the earth wire to the terminal (F) and then connect the electrical wires by respecting the polarities to the fitting (E) terminals (D).(Fig.6 page 15)

Position the fitting (E) into the support (C) and fasten the lamp holder sleeve (B).(Fig.4 page 14)

IC S2 F3176059

RF3160200 E27 LAMP HOLDER ASSEMBLY

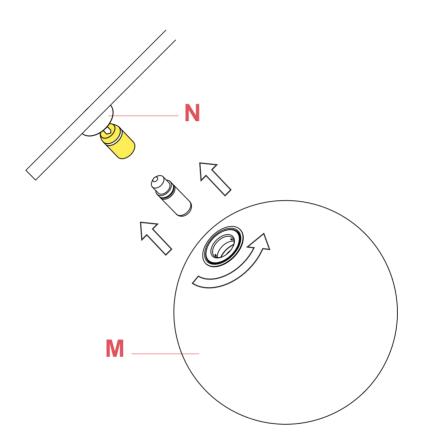


Fig.8

Insert the lamp bulb and fasten the glass diffuser (M) to the ferrule (N) of the lamp body.