
FLOS

KELVIN LED GM

Designed by Antonio Citterio, 2009

F3311030

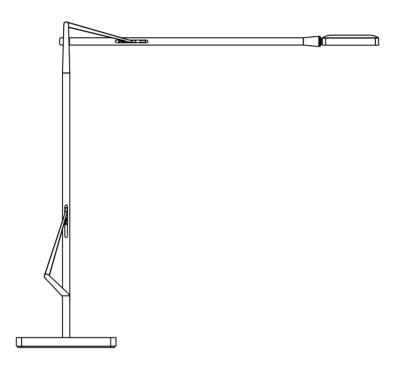

FLOS

ΕN


KELVIN LED GM

- 01. RF3320100 Black Plug kit & driver
- 02. RF18764 Black insert for lamp base
- 03. F3322030A Kelvin Led black base
- 04. F3312030A Kelvin Led black body

KELVIN LED GM F3311030

EΝ

RF3320100 BLACK PLUG KIT & DRIVER

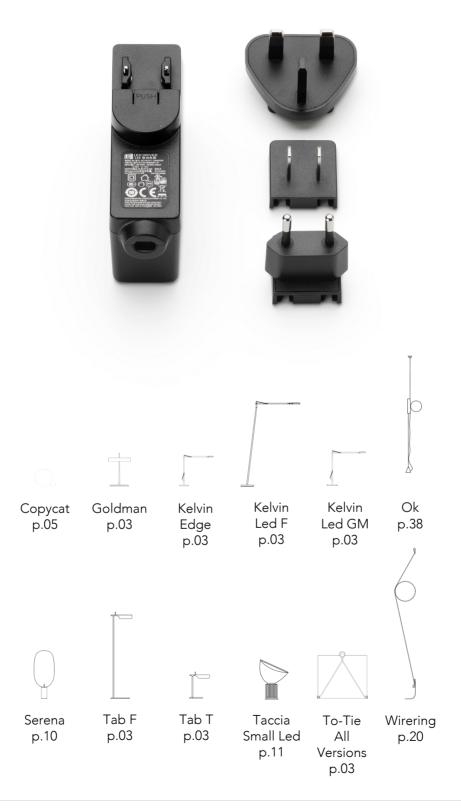


REV. 1 DATE 22/07/2021

EN

KELVIN LED GM F3311030

RF3320100

BLACK PLUG KIT & DRIVER

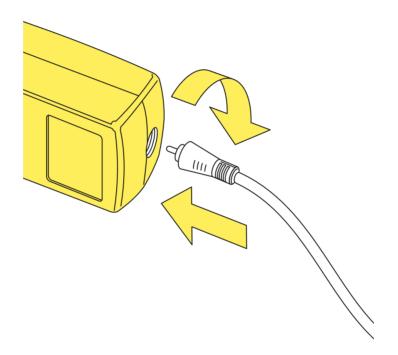



Insert the plug into the driver unit by using the guides snap it inside its apposite slot (use the correct type of plug for the area in which the device must be installed), connect the plug to the feeder unit locking it in by rotating it 90° clockwise.

KELVIN LED GM F3311030

EN

RF18764 BLACK INSERT FOR LAMP BASE




EΝ

KELVIN LED GM F3311030

RF18764

BLACK INSERT FOR LAMP BASE

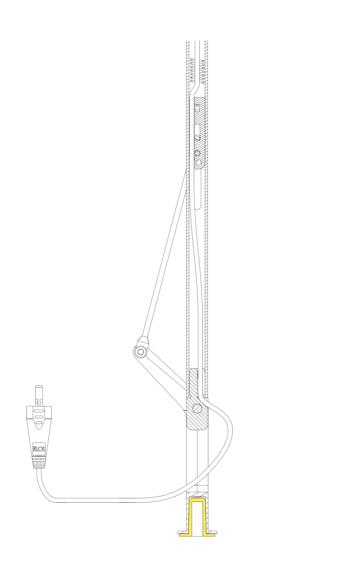



Glue the insert inside the lower joint by utilizing a bicomponent glue.

EN

KELVIN LED GM F3311030

F3322030A KELVIN LED GM BLACK BASE




REV. 1 DATE 22/07/2021

EΝ

KELVIN LED GM F3311030

F3322030A

KELVIN LED GM BLACK BASE

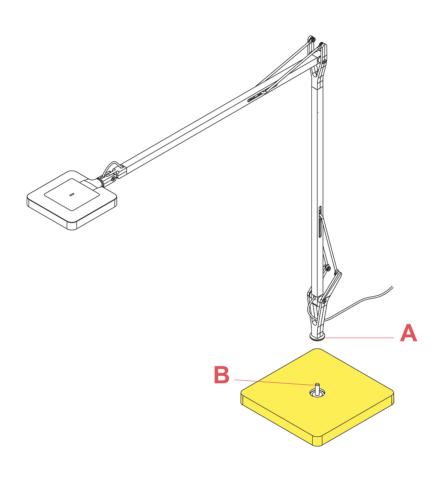



Insert the support (A) of the device into the pin (B) of the base.

EΝ

KELVIN LED GM F3311030

F3312030A KELVIN LED GM BLACK BODY



EΝ

KELVIN LED GM F3311030

F3312030A KELVIN LED GM BLACK BODY

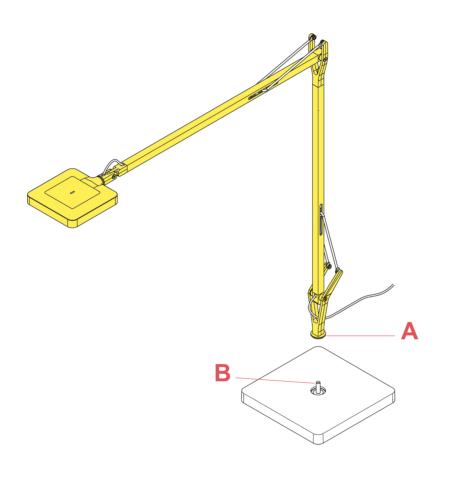


Fig.1

Insert the support (A) of the device into the pin (B) of the base.