


RAY F1

Designed by Rodolfo Dordoni, 2007

F5916009




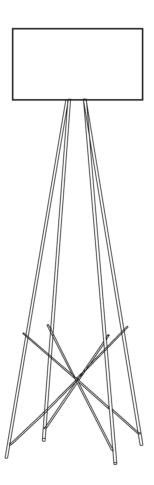

RAY F1

ΕN

F5916009

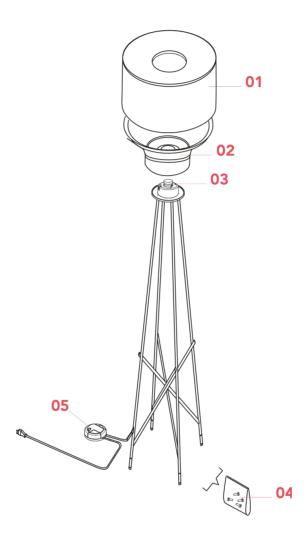

- $\textbf{01. RF16085} \ \ \text{Polished white aluminium F1-T}$
- 02. RF15854 F1-T Diffuser support
- **03. RF04487** E27 620 Porcelain lamp holder
- **04. RF5912100** Kit of quantity 4 adjustable feet
- **05. RF28045** Led 220-240V 40-250W 4-100W Rondò dimmer



ΕN

RF16085

F1-T DIFFUSER





Ray F1 p.03



Ray T p.03

ΕN

RF16085

F1-T DIFFUSER

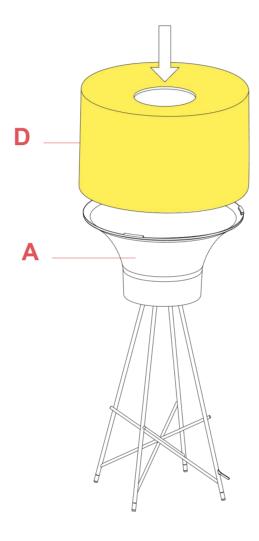


Fig.1

Position the diffuser (D) on the support (A).



ΕN

RF15854

F1-T DIFFUSER SUPPORT





Ray F1 p.05



Ray T p.05

ΕN

RF15854

F1-T DIFFUSER SUPPORT

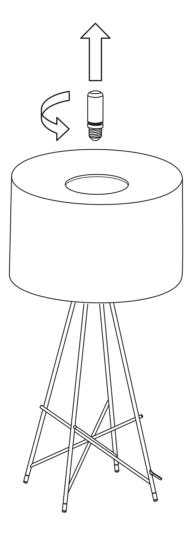


Fig.1

Verify that the lamp-bulb has been removed from the device.

ΕN

RF15854

F1-T DIFFUSER SUPPORT

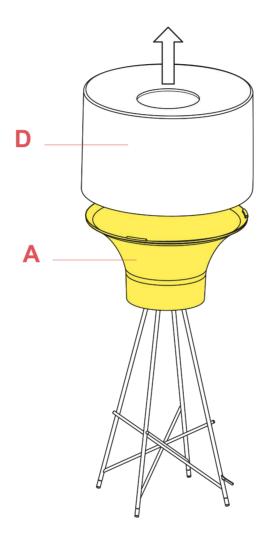


Fig.2

Remove the diffuser (D) from its support (A).

ΕN

RF15854

F1-T DIFFUSER SUPPORT

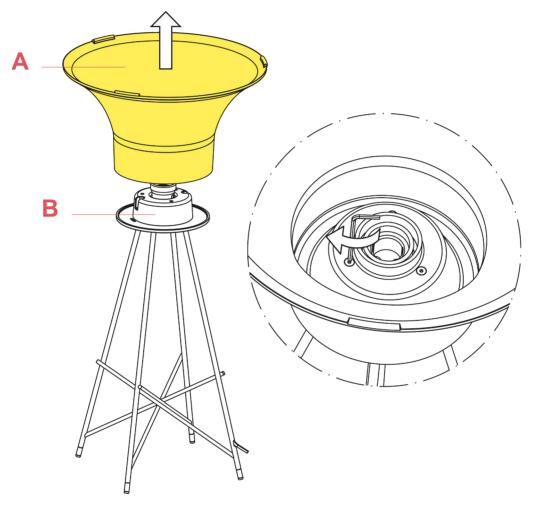


Fig.3

Unfasten the three screws (C) inside the diffuser support (A), by utilizing an Allen key and then remove the diffuser support (A) from the unit (B).

Assemble now the new spare-part: Assemble the diffuser support (A) on the unit (B) by fastening the screws (C).

Collocate the diffuser (D) on the diffuser support (A).(Fig.2 page 7)

Insert the lamp-bulb.(Fig.1 page 6)




ΕN

RF04487

PORCELAIN E27 LAMP HOLDER





Nebula p.03



Ray F1 p.09



Ray F2 p.09



Ray T

p.09



Tatou S2 p.16

ΕN

RF04487

PORCELAIN E27 LAMP HOLDER

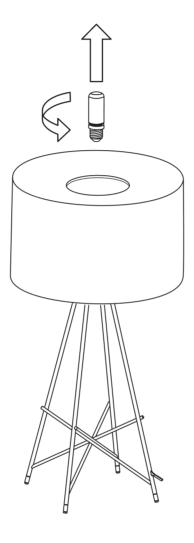


Fig.1

Verify that the lamp-bulb has been removed from the device.

ΕN

RF04487

PORCELAIN E27 LAMP HOLDER

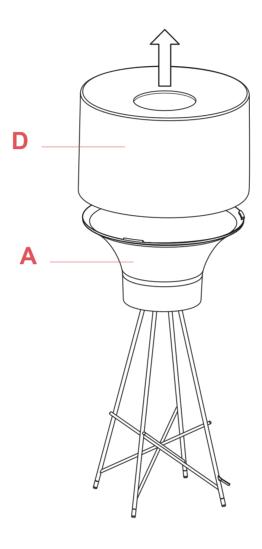


Fig.2

Remove the diffuser (D) from its support (A).

ΕN

RF04487

PORCELAIN E27 LAMP HOLDER

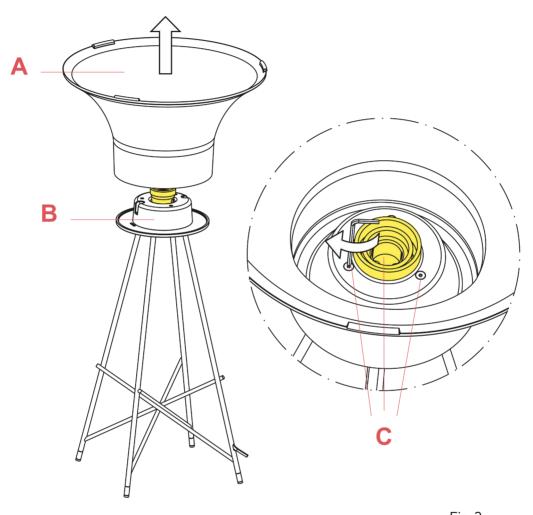


Fig.3

Unfasten the three screws (C) inside the diffuser support (A), by utilizing an Allen key and then remove the diffuser support (A) from the unit (B).

ΕN

RF04487

PORCELAIN E27 LAMP HOLDER





Fig.4

Fig.5



Fig.6

Unfasten the two lateral screws (E) of the lamp holder protection cover.

Lift up the lamp holder protection cover and unfasten the screws (F) of the cable clamp.

Unfasten the lamp holder fixing screws (G).

ΕN

RF04487

PORCELAIN E27 LAMP HOLDER



Fig.7



Fig.8

Disconnect the electrical wires (H) from the lamp holder terminals (I).

Assemble now the new spare-part:

Connect the electrical wires (H) of the lamp holder by respecting the polarities (I) indicated in correspondence of the connection terminal.

Connect the Brown (live) wire in the terminal indicated with "L" and then connect the Blue (neutral) wire in the other terminal indicated with "N".

Fasten the lamp holder fixing screws (G).(Fig.6 page 13)

Clamp the cable by fastening the screws (F) of the cable clamp. (Fig. 5 page 13)

Assemble the protection cover by fastening the two lateral screws (E).(Fig.4 page 13)

Collocate the diffuser (D) on the diffuser support (A).(Fig.2 page 11)

Insert the lamp-bulb. (Fig.1 page 10)



ΕN

RF5912100

KIT OF QUANTITY 4 ADJUSTABLE FEET





Ray F1 p.15



Ray F2 p.15

ΕN

RF5912100

KIT OF QUANTITY 4 ADJUSTABLE FEET

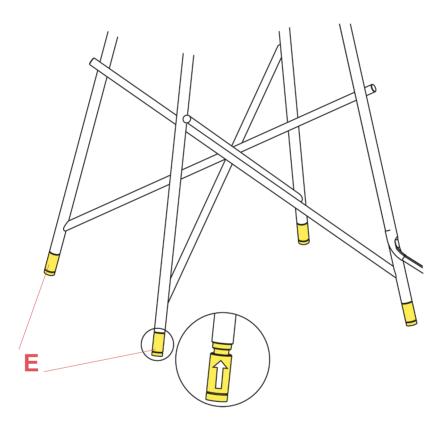


Fig.1

Screw the adjustable feet (E) to the lamp legs.




ΕN

RF28045

LED 220/240V 40-250W 4-100W RONDÒ DIMMER



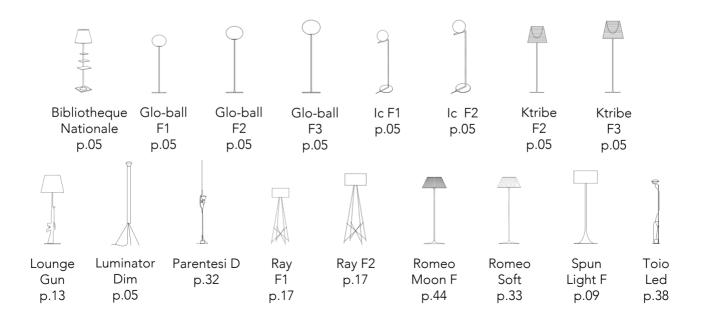

ΕN

RF28045

LED 220/240V 40-250W 4-100W RONDÒ DIMMER



Fig.1



Fig.2

Open the box of the damaged dimmer.

For the opening, it is necessary to remove the rubber pad from underneath the dimmer box (refer to fig.1);

Unfasten the screw that locks the triangle terminal cover (refer to fig.2);

ΕN

RF28045

LED 220/240V 40-250W 4-100W RONDÒ DIMMER



Fig.3



Fig.4

Turn the dimmer box and remove the terminal cover (refer to fig. 3);

Unfasten the three screws of the cable clamps (refer to fig. 4);

ΕN

RF28045

LED 220/240V 40-250W 4-100W RONDÒ DIMMER



Fig.5



Fig.6

Remove the cable clamp (refer to fig. 5) and disconnect the cables from the green terminal box (refer to fig. 6).

Assemble now the new dimmer:

Connect the cables respecting the polarities, lock the wires by positioning the cable clamp and then fasten the three screws, cover the green terminal box with the triangle cover, turn the dimmer box, fasten the screw and stick-on the rubber pads.