


# **SUPERLOON**

Designed by Jasper Morrison, 2015

F6630030




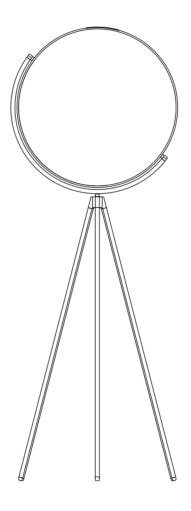

## **SUPERLOON**

ΕN

F6630030

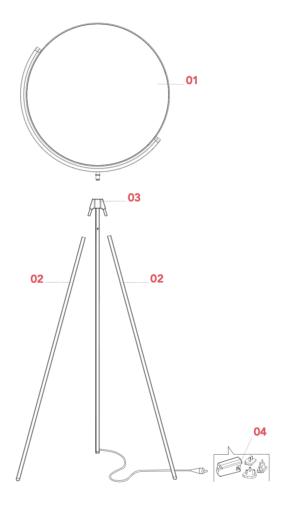

- 01. F6632030 Black diffuser
- 02. RF25185 Black mobile legs
- 03. RF6630130 Black electrified fuxed leg
- **04. RF3320400** 48V Power supply unit with plug kit



ΕN

# F6632030

BLACK DIFFUSER



ΕN

# F6632030

BLACK DIFFUSER

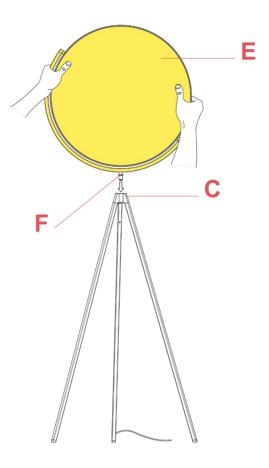


Fig.1

Mount the diffuser head (E) inserting the pin (F) in the hole of the base element (C).

ΕN

## F6632030

BLACK DIFFUSER

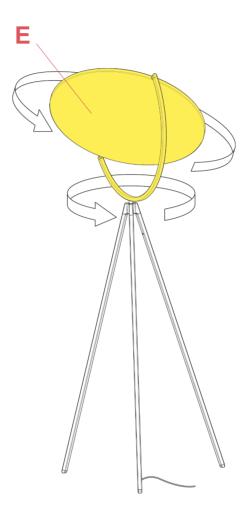


Fig.2

The light beam's direction can be adjusted by rotating the head (E) into the desired position.



ΕN

# RF25185

MOBILE LEGS

ΕN

## RF25185

**MOBILE LEGS** 

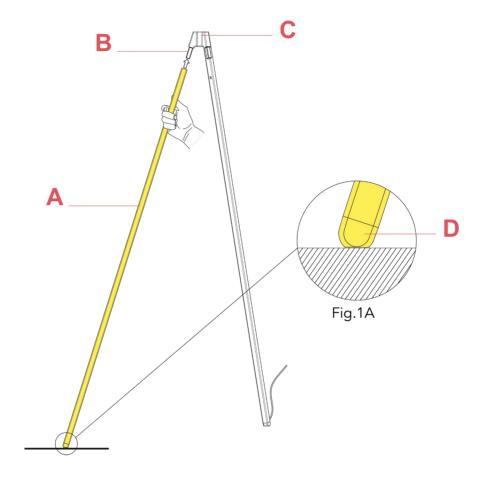


Fig.1

Insert the two legs (A) in the pins (B) of the base element (C) paying attention to the correct orientation of the feet (D) as indicated in Pic. 1A



ΕN

## RF6630130

BLACK ELECTRIFIED FIXED LEG



ΕN

## RF6630130

BLACK ELECTRIFIED FIXED LEG

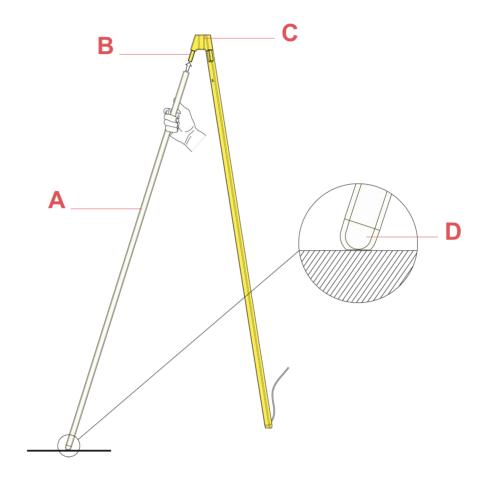


Fig.1

Insert the two legs (A) in the pins (B) of the base element (C) paying attention to the correct orientation of the feet (D).

ΕN

## RF6630130

BLACK ELECTRIFIED FIXED LEG

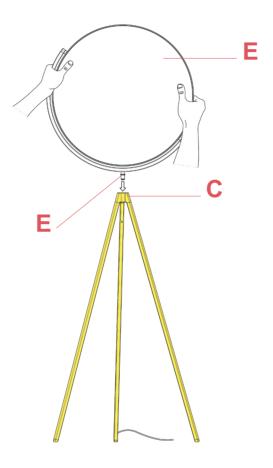


Fig.2

Mount the diffuser head (E) inserting the pin (F) in the hole of the base element (C).

ΕN

## RF6630130

BLACK ELECTRIFIED FIXED LEG

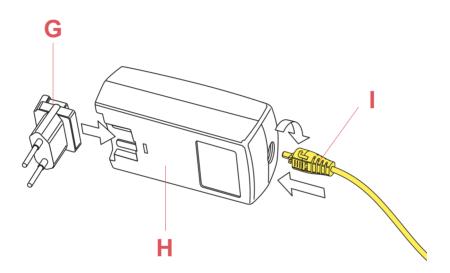


Fig.3

Connect the plug (I) to the feeder unit locking in by rotating it 90° clockwise.

ΕN

#### RF6630130

**BLACK ELECTRIFIED FIXED LEG** 

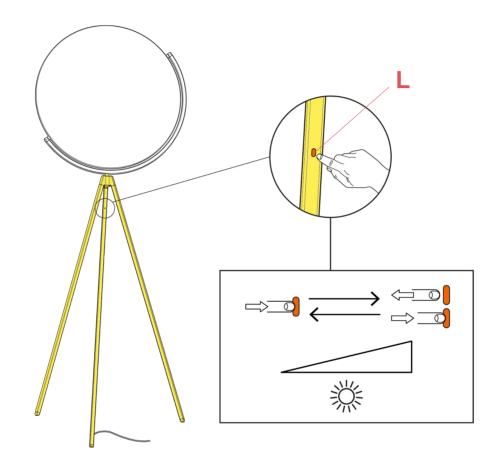


Fig.4

To switch on/off the device lightly touch the sensor (L); prolonged contact with the sensor causes the progressive increase of the light intensity from 10% up to 100% and at the same time an increase of the colour temperature from 2200K to 2800K; when the desired intensity is reached, remove finger from the button. A successive prolonged contact with the sensor will cause the progressive decrease. NOTE:

Thanks to the card's

memory, when the device is turned on from a wall switch, it comes on again at the same brightness level it was at when it was turned off. The brightness level (and corresponding colour temperature) is automatically

activated by the LED card after at least 15 seconds' fixed operation (without making adjustments).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.




ΕN

#### RF3320400

POWER SUPPLY UNIT WITH PLUG KIT





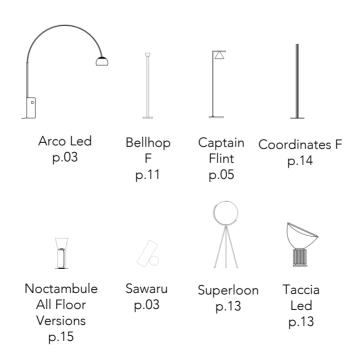

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

ΕN

#### RF3320400

POWER SUPPLY UNIT WITH PLUG KIT

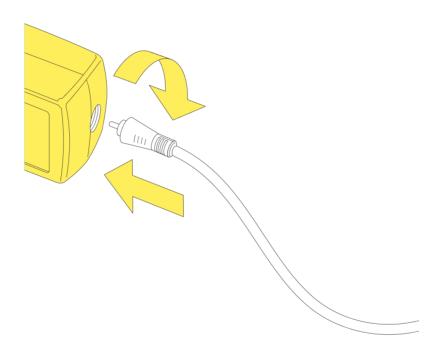


Fig.1

Insert the plug into the power unit. By using the guides, snap the plug inside its apposite slot (use the correct type of plug for the country in which the device must be installed).