

TABLE GUN

Designed by R. & Philippe Starck, 2005

F2954000


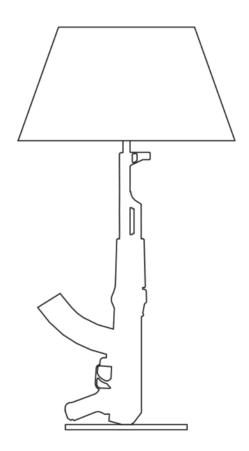




TABLE GUN

ΕN

F2954000

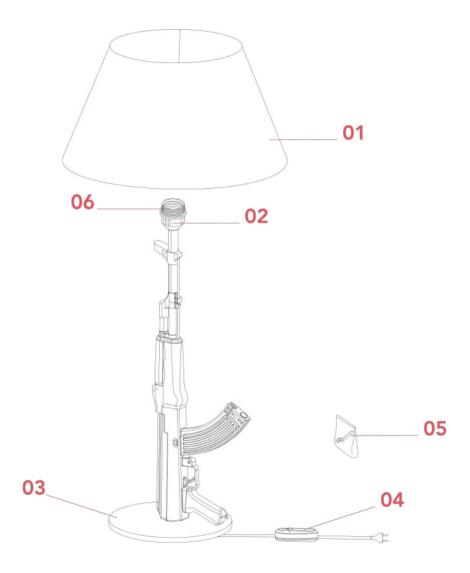

01. F2962030 - Black diffuser

02. RF13750 - Black E27 lamp holder

03. RF27093 – Glossy gold lux base assembly

04. RF32262 – Led dimmer 1004P LFP100-240V 4-150WHL 4-25W

05. RF13905 – Locking key tool

06. RF11919 – Ring nut



ΕN

F2962030

BLACK DIFFUSER ASSEMBLY



ΕN

F2962030

BLACK DIFFUSER ASSEMBLY

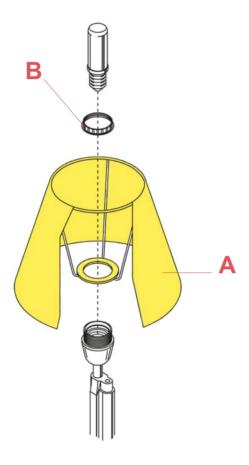


Fig.1

Unfasten-off the lamp-bulb. Remove the diffuser (A) by unfastening the locking nut (B).

Assemble now the new spare-part:
Position by collocating the diffuser (A) on the body and lock it by fastening the locking nut (B).
Insert the lamp-bulb.



ΕN

RF13750

BLACK E27 LAMP HOLDER





Bedsid e Gun p.05



Lounge Gun p.05



Table Gun p.05

ΕN

RF13750

BLACK E27 LAMP HOLDER



Fig.1



Fig.2

By utilizing a tiny flat screw driver, carefully push towards the inside the side spring of the lamp holder in away to free the sleeve of the lamp holder;

ΕN

RF13750

BLACK E27 LAMP HOLDER



Fig.3



Fig.4

Unfasten the sleeve from the lamp holder assembly;

ΕN

RF13750

BLACK E27 LAMP HOLDER

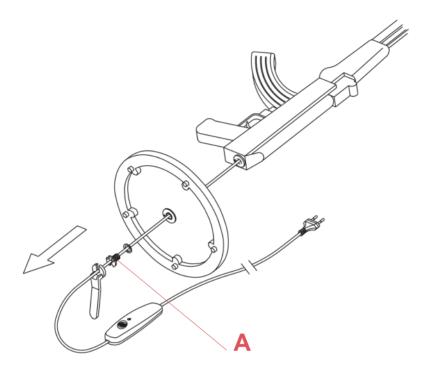


Fig.5

To free the electrical cable, unfasten the locking screw (A) from under the base;

Delicately pull-up the electrical cable to have access to the electrical terminal lamp holder contacts;

Disconnect the wires and free the black lamp holder support by unfastening the screw through a flat tiny screw driver;

Assemble now the new spare-part:

Install the lamp holder support, connect the lamp holder contacts, push down the electrical cable, fasten back the lamp holder sleeve, push back in position the lateral spring and for last, fasten the locking screw under the base.



ΕN

RF27093

BASE ASSEMBLY



ΕN

RF27093

BASE ASSEMBLY

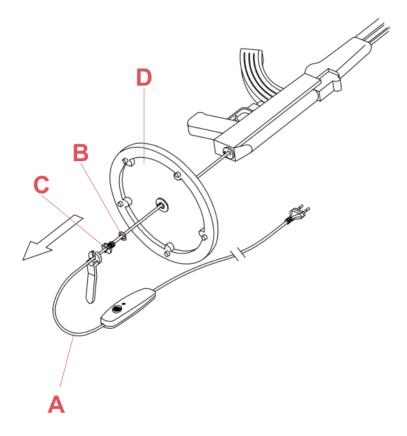


Fig.1

Disconnect from the dimmer the electrical cable (A) that goes to the lamp structure and free the cable through the cable clamps;

Unfasten the locking screw (C) from the base and slide it out from the electrical cable (A);

Slide out the washer (B) and the damaged base (D); Slide through the cable (A) the new base (D), following the washer (B) and then the locking screw (C).

Connect the lamp structure electrical cable (A) back to the dimmer and then lock the cable through its apposite cable clamp.

ΕN

RF27093

BASE ASSEMBLY

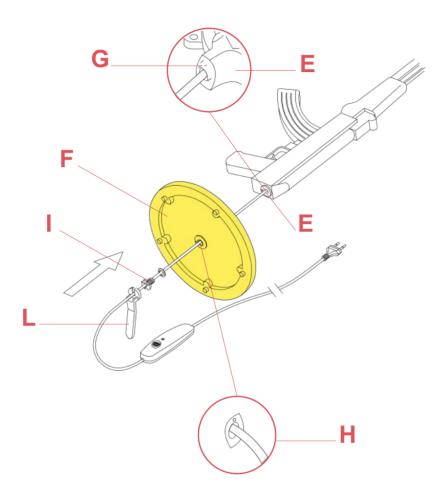


Fig.2

Position the lamp structure (E) on the base (F) ensuring that the safety pin (G) enters in its appropriate hole (H); Lock the base (F) on to the lamp structure (E) by tightening the locking screw (I) with a tool key (L).




ΕN

RF32262

DIMMER LED 1004P LFP100-240V 4-150WHL 4-25W



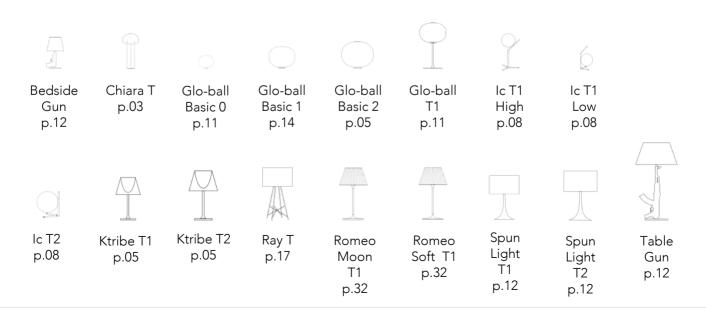

ΕN

RF32262

LED DIMMER 1004P LFP100-240V 4-150WHL 4-25W



Fig.1



Fig.2

Open the dimmer box of the damaged dimmer.

For the opening, it is necessary to remove the n°2 screws using a star screw driver.

Lift-up the dimmer casing from the dimmer base;

ΕN

RF32262

LED DIMMER 1004P LFP100-240V 4-150WHL 4-25W

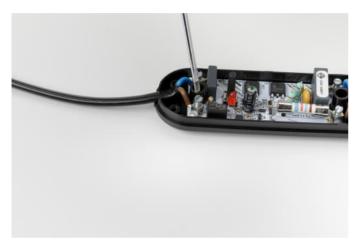


Fig.3



Fig.4




Fig.3.1

Remove the cable clamps by unfastening the 4 screws (A) and disconnect the wires from the terminal blocks through a tiny flat headed screw driver;

Replace the dimmer and connect the wires. When connecting the wires it is necessary to respect the polarities ($L = Brown \ and \ N = Blue$) to the terminal box.

Lock the electrical cables by fastening the screws (A) of the cable clamps and make sure to block the

isolation of the electrical cable.

Close the dimmer box.

It is necessary to place the casing on top and press down until it locks in.

it is necessary to insert the n°2 screws using a star screw driver




ΕN

RF13905

LOCKING KEY TOOL





ΕN

RF13905

LOCKING KEY TOOL

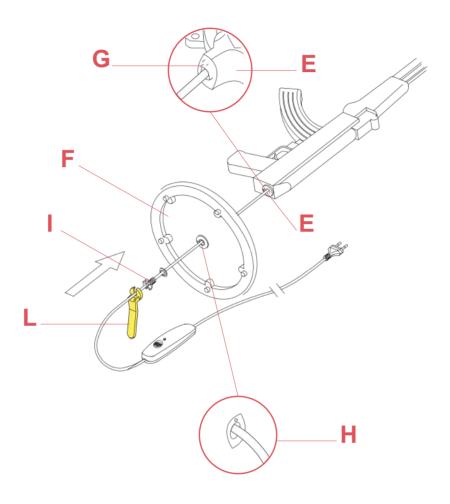


Fig.1

Position the lamp structure (E) on the base (F) ensuring that the safety pin (G) enters in its appropriate hole (H);

Lock the base (F) on to the lamp structure (E) by tightening the locking screw (I) with the tool key (L).




ΕN

RF11919

RING NUT





ΕN

RF11919

RING NUT

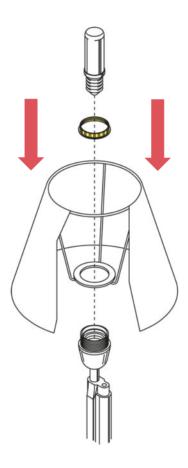


Fig.1

Place the diffuser on the main body. Lock the diffuser by fastening the new locking nut and insert the lamp bulb.