

Designed by R. & Philippe Starck, 2005

F2955000

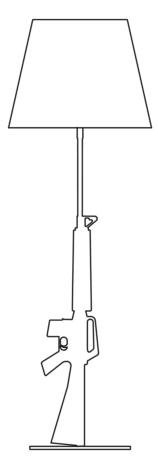

EN

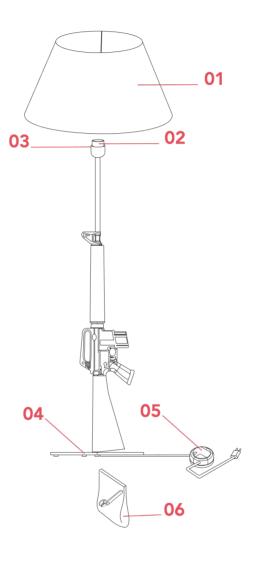

01. F2965030 – Black diffuser 02. RF13750 – Black E27 lamp holder 03. RF11919 – Ring nut 04. RF27102 – Polished gold base 05. RF28045 – Led 220/240V 40-250W 4-100W Rondò dimmer 06. RF13905 – Locking key tool

EN





EΝ



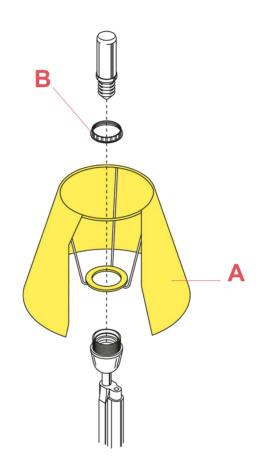


Fig.1

Unfasten-off the lamp-bulb. Remove the diffuser (A) by unfastening the locking nut (B).

Assemble now the new spare-part: Position by collocating the diffuser (A) on the body and lock it by fastening the locking nut (B). Insert the lamp-bulb.

REV. 1 DATE 26/08/2021

EΝ

**LOUNGE GUN** F2955000

RF13750 BLACK E27 LAMP HOLDER





EN

LOUNGE GUN F2955000

RF13750 BLACK E27 LAMP HOLDER



Fig.1



Fig.2

By utilizing a tiny flat screw driver, carefully push towards the inside the side spring of the lamp holder in away to free the sleeve of the lamp holder;

EN

LOUNGE GUN F2955000

**RF13750** BLACK E27 LAMP HOLDER



Fig.3



Fig.4

Unfasten the sleeve from the lamp holder assembly;

EΝ

## RF13750

BLACK E27 LAMP HOLDER

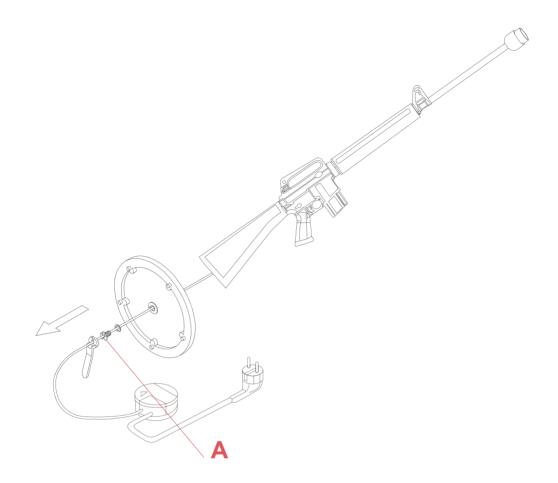


Fig.5

To free the electrical cable, unfasten the locking screw (A) from under the base; Delicately pull-up the electrical cable to have access to the electrical terminal lamp holder contacts;

Disconnect the wires and free the black lamp holder support by unfastening the screw through a flat tiny screw driver;

#### Assemble now the new spare-part:

Install the lamp holder support, connect the lamp holder contacts, push down the electrical cable, fasten back the lamp holder sleeve, push back in position the lateral spring and for last, fasten the locking screw under the base.

EN








EN

RF27102 POLISHED GOLD BASE

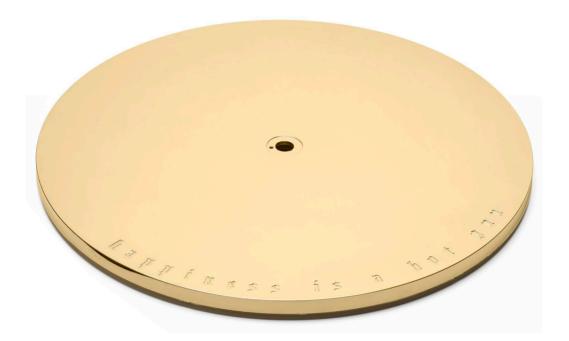

EN



POLISHED GOLD BASE


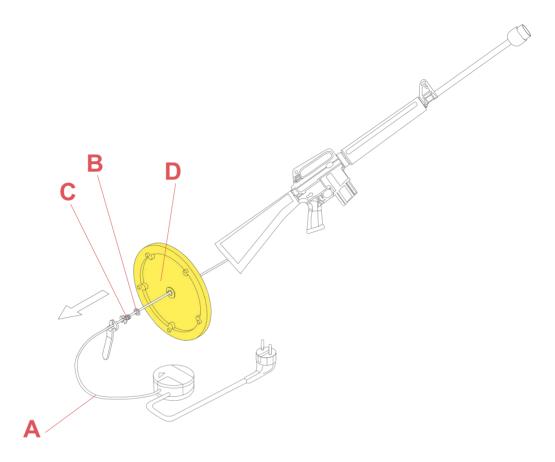


Fig.1

Disconnect from the dimmer the electrical cable (A) that goes to the lamp structure and free the cable through the cable clamps; Unfasten the locking screw (C) from the base and slide it out from the electrical cable (A); Slide out the washer (B) and the damaged base (D); Slide through the cable (A) the new base (D), following the washer (B) and then the locking screw (C). Connect the lamp structure electrical cable (A) back to the dimmer and then lock the cable through its apposite cable clamp.

EN

RF27102 POLISHED GOLD BASE

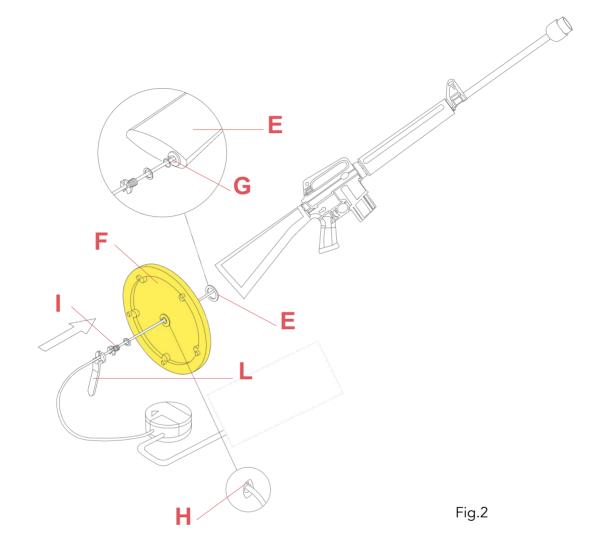

Position the lamp structure (E) on the base (F) ensuring that the safety pin (G) enters in its appropriate hole (H); Lock the base (F) on to the lamp structure (E) by tightening the locking screw (I) with a tool key (L).

REV. 1 DATE 26/08/2021


LOUNGE GUN F2955000

EΝ

### RF28045

LED 220/240V 40-250W 4-100W RONDÒ DIMMER



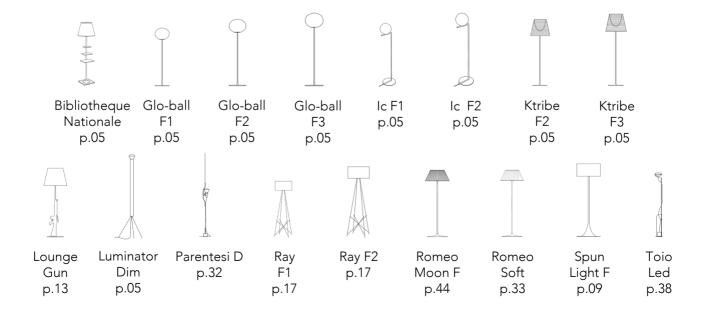

EN

### RF28045

LED 220/240V 40-250W 4-100W RONDÒ DIMMER







Fig.2

Open the box of the damaged dimmer.

For the opening, it is necessary to remove the rubber pad from underneath the dimmer box (refer to fig.1); Unfasten the screw that locks the triangle terminal cover (refer to fig.2);

EN

### RF28045

LED 220/240V 40-250W 4-100W RONDÒ DIMMER







Fig.4

Turn the dimmer box and remove the terminal cover (refer to fig. 3);

Unfasten the three screws of the cable clamps (refer to fig. 4);

EN

### RF28045

LED 220/240V 40-250W 4-100W RONDÒ DIMMER



Fig.5



Fig.6

Remove the cable clamp (refer to fig. 5) and disconnect the cables from the green terminal box (refer to fig. 6).


Assemble now the new dimmer:

Connect the cables respecting the polarities, lock the wires by positioning the cable clamp and then fasten the three screws, cover the green terminal box with the triangle cover, turn the dimmer box, fasten the screw and stick-on the rubber pads.

EΝ







# FLOS

LOUNGE GUN F2955000

EN



Fig.1

