


# Box\_W1 Mono Emission



Wall Lights | 220-240 V | 72 topLED 26 W DC - 28 W AC | CRI 80  
8775

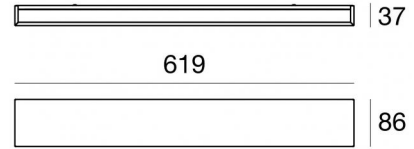

Technical data	
Type	Wall Lights
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Optics	Diffused
Light emission direction	upward
Nominal power	26 W DC
Total Power	28 W
Source lumens	3087 lm
Voltage	220 - 240 V AC
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	No
CE	No
Driver included	Driver
Dimmable article	Phase cut
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Double emission
Net weight	1 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing	
Material	Iron
Colour	concrete dark grey
Processing	Coating
Finishing diffuser	
Material	PMMA
Colour	opaline

# Box\_W1 Mono Emission



Wall Lights | 220-240 V | 72 topLED 26 W DC - 28 W AC | CRI 80 | Base 8775

Double emission wall lights for indoor application. The warm white LED light source with a diffused light distribution is composed of 72 topLED LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 3087 lm, with a 118.7 lm/W nominal luminous efficacy.

The device body is made of iron and features a concrete dark grey finish, processed by means of coating; the diffuser is made of pmma. The ingress protection degree is IP40; the total weight is of 1 kg.

The total absorbed power is 28 W.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

## Energy efficiency class

This product contains 2 light sources of energy efficiency class D.

## Illuminotechnical Features

Light Output Ratio (LOR)	75 %
Source lumens	3087 lm
Delivered lumens	2334 lm
Consumption	28 W
Luminaire efficacy	83 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

## LED Life / Failure Ratio


L70 B20 C0 72500h

## UGR

UGR axial	18.3
UGR transversal	24.6
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

## OPTICAL

C90/C270 optics	111°
C0/C180 optics	126°
Light distribution simmetry	Symmetrical 2 assis

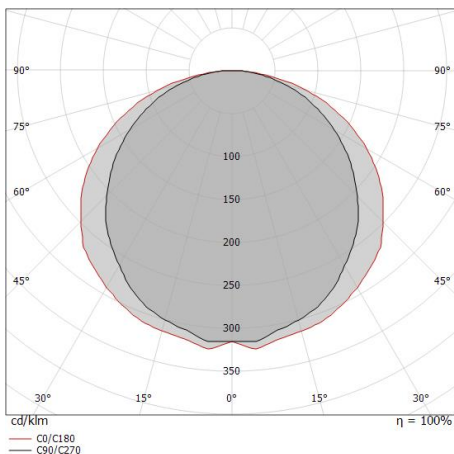

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	1.46 1.98	E(0°) 2944 E(C90) 270 E(C0) 140
1.0	2.91 3.96	E(0°) 736 E(C90) 67 E(C0) 35
1.5	4.37 5.94	E(0°) 327 E(C90) 30 E(C0) 16
2.0	5.82 7.92	E(0°) 184 E(C90) 17 E(C0) 9
2.5	7.28 9.90	E(0°) 118 E(C90) 11 E(C0) 6
3.0	8.73 11.88	E(0°) 82 E(C90) 7 E(C0) 4

Distance [m] Cone diameter [m] illuminance [lx]

— C0/C180 (Half-peak divergence: 126.4°)  
— C90/C270 (Half-peak divergence: 111.0°)

# Box\_W1 Mono Emission



Box\_W1 Mono Emission | Wall Lights | Accessories  
8775



Dimmer  
220-240V

**Code**

KIT0026