





Ceiling Lights | 220-240 V
1 topLED 14 W DC - 17 W AC | CRI 80
8276



Technical data	
Type	Surface
Installation position	Wall lights - Ceiling
Installation environment	Indoor
Light Source	LED
Optics	Diffused
Light emission direction	downward
Nominal power	14 W DC
Total Power	17 W
Source lumens	1628 lm
Voltage	220 - 240 V AC
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	1 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing	
Material	Iron
Colour	dark iron
Processing	Brushing

Finishing diffuser	
Material	PMMA
Colour	opaline



Ceiling Lights | 220-240 V | 1 topLED 14 W DC - 17 W AC | CRI 80 | Base 8276

Single emission ceiling lights for indoor application. The warm white LED light source with a diffused light distribution is composed of 1 topped LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 1628 lm, with a 116.3 lm/W nominal luminous efficacy.

The device body is made of iron and features a dark iron finish, processed by means of brushing; the diffuser is made of pmma. The ingress protection degree is IP40; the total weight is of 1 kg.

The total absorbed power is 17 W.

The device features protection class I and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class F.

Illuminotechnical Features

Light Output Ratio (LOR)	73 %
Source lumens	1628 lm
Delivered lumens	1200 lm
Consumption	17 W
Luminaire efficacy	70 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Junction temperature (lighting fixture)	80

Standard Operating Ambient Temperature 25°C

LED Life / Failure Ratio


L70 B20 C0 72500h

UGR

UGR axial	20.2
UGR transversal	20.5
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL


C90/C270 optics	120°
C0/C180 optics	124°
Light distribution symmetry	Symmetrical 2 axis

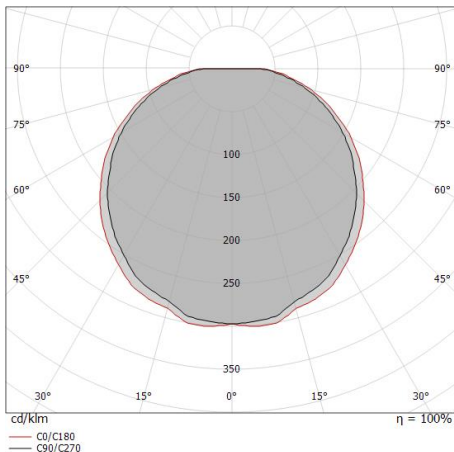

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	1.74 1.89	E(0°) 1426 E(C90) 89 E(C0) 74
1.0	3.48 3.78	E(0°) 356 E(C90) 22 E(C0) 19
1.5	5.22 5.67	E(0°) 158 E(C90) 10 E(C0) 8
2.0	6.96 7.55	E(0°) 89 E(C90) 6 E(C0) 5
2.5	8.70 9.44	E(0°) 57 E(C90) 4 E(C0) 3
3.0	10.43 11.33	E(0°) 40 E(C90) 2 E(C0) 2

Distance [m] Cone diameter [m] illuminance [lx]

— C0/C180 (Half-peak divergence: 124.2°)
— C90/C270 (Half-peak divergence: 120.2°)




Fixing base

Material:Iron, colour:Embossed white RAL 9003, processing:Coating.

Code

KIT0120



Fixing base

Material:Iron, colour:Embossed black RAL 9005, processing:Coating.

Code

KIT0121