
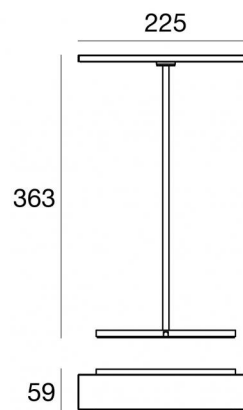


Dublight_C tab



Table Lamps | 220-240 V
24 topLED 6 W DC - 8 W AC | CRI 90

7888

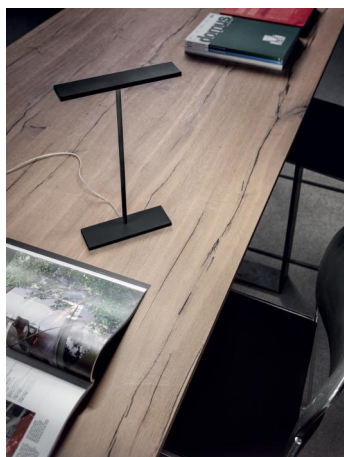

Technical data	
Construction year	2020
Type	Table Lamps
Installation position	Floor
Installation environment	Indoor
Light Source	LED
Total Power	8 W
Source lumens	710 lm
Voltage	220 - 240 V AC
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP40
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Electric socket	Type C
Cable length	2.8 m
Resin potting	No
Type of light emission	Single emission
Net weight	1.240 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing	
Material	Aluminium
Colour	Embossed black RAL 9005
Processing	Coating
Finishing diffuser	
Material	PC
Colour	transparent
Finishing mounting frame	
Material	Iron
Colour	Embossed black RAL 9005
Processing	Coating

Table Lamps | 220-240 V | 24 topLED 6 W DC - 8 W AC | CRI 90 | Base 7888

Single emission table lamps for indoor application. The warm white LED light source with a diffused light distribution is composed of 24 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 710 lm, with a 118.3 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a embossed black ral 9005 finish, processed by means of coating; the diffuser is made of PC; the mounting frame is made of iron, with a embossed black ral 9005 finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 1.240 kg.

The total absorbed power is 8 W. The power supply cable is included and features a 2.8 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class F.

Illuminotechnical Features

Light Output Ratio (LOR)	76 %
Source lumens	710 lm
Delivered lumens	543 lm
Consumption	8 W
Luminaire efficacy	67 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80

Standard Operating Ambient Temperature	25°C
--	------

LED Life / Failure Ratio

L80 B20 C0 80000h

