



Halfpipe 2

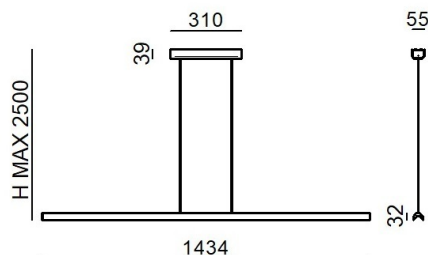

Wall Lights | 220-240 V
228 topLED 38 W DC - 42 W AC | CRI 90
9813

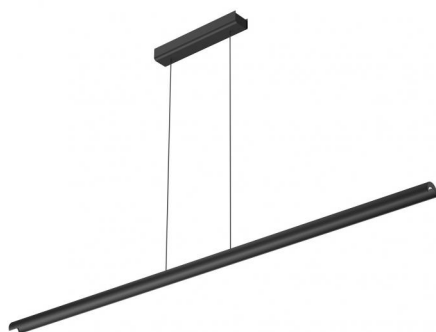

Technical data	
Type	Wall Lights
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Total Power	42 W
Source lumens	5042 lm
Voltage	220 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	Phase cut
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	5 m
Resin potting	No
Type of light emission	Single emission
Net weight	2.600 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing	
Material	Aluminium
Colour	Embossed black RAL 9005
Processing	Coating

Finishing diffuser	
Material	PC
Colour	opaline

Finishing mounting frame	
Material	Iron
Colour	Embossed black RAL 9005
Processing	Coating

Cables Electrification+suspension	
Max cable length	5000 mm

Halfpipe 2



Wall Lights | 220-240 V | 228 topLED 38 W DC - 42 W AC | CRI 90 | Base
9813


Single emission wall lights for indoor application. The warm white LED light source with a diffused light distribution is composed of 228 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 5042 lm, with a 132.7 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a embossed black ral 9005 finish, processed by means of coating; the diffuser is made of PC; the mounting frame is made of iron, with a embossed black ral 9005 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 2.600 kg.

The total absorbed power is 42 W. The power supply cable is included and features a 5 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

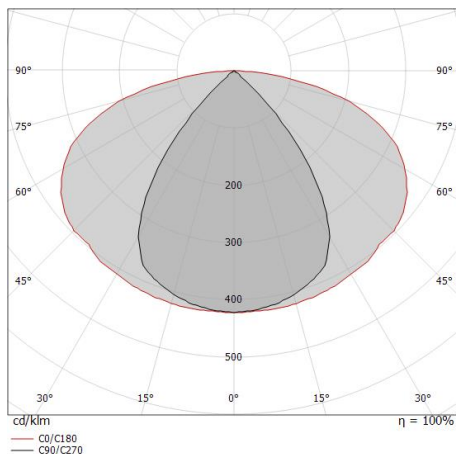

Distance [m]	Cone diameter [m]	Illuminance [lx]	E(0°)	E(C90)	E(C0)
0.5	0.79 3.66	3074 746 28	38.2°	74.7°	74.7°
1.0	1.57 7.31	769 187 7	38.2°	74.7°	74.7°
1.5	2.36 10.97	342 83 3	38.2°	74.7°	74.7°
2.0	3.15 14.62	192 47 2	38.2°	74.7°	74.7°
2.5	3.93 18.28	123 30 1	38.2°	74.7°	74.7°
3.0	4.72 21.93	85 21 1	38.2°	74.7°	74.7°

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 149.4°)
— C90/C270 (Half-peak divergence: 76.4°)

Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	36 %
Source lumens	5042 lm
Delivered lumens	1819 lm
Consumption	42 W
Luminaire efficacy	43 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

LED Life / Failure Ratio

L70 B20 C0 72500h (at Tj 115 Ta 25)

UGR

UGR axial	14.5
UGR transversal	28.5
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20


OPTICAL

C90/C270 optics	76°
C0/C180 optics	149°
Light distribution simmetry	Symmetrical 2 assis

Halfpipe 2



Halfpipe 2 | Wall Lights | Accessories
9813



Dimmer
220-240V

Code
KIT0026