


# Oh!\_FL65 E27



Floor Lamp | 220-240 V | 1xE27  
**16162**



Ø 550

Technical data	
Type	Floor Lamp
Installation position	Floor
Installation environment	Outdoor
Lamp cap	1 x E27 Max 46W
Light emission direction	upward
Frequency	50-60 Hz
Optics	Diffused
Safety class	2
IP	IP65
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Electric socket	Type F
Cable length	5 m
Resin potting	No
Net weight	4.200 Kg

Finishing diffuser	
Material	PE
Colour	neutral

Finishing mounting frame	
Material	PC
Colour	white

# Oh!\_FL65 E27



Floor Lamp | 220-240 V | 1xE27 | Base  
**16162**

Single emission floor lamp for outdoor application. Compatibility: LED lamp, halogen 46 W, compact fluo 30 W; lamp cap 1xE27.

The diffuser is made of pe; the mounting frame is made of PC, with a white finish. The ingress protection degree is IP65; the total weight is of 4.200 kg.

. The power supply cable is included and features a 5 m length.

The device features protection class II and can be floor-mounted with an outer casing, code 14930(for concrete or masonry).


Compliant with the EN 60598-1 standard and its specific provisions.

## Illuminotechnical Features

Light Output Ratio (LOR)	79 %
Source lumens	700 lm
Delivered lumens	1506 lm
Consumption	30 W
Luminaire efficacy	63 lm/W
Colour rendering index	100 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	-20 / +50°C


## OPTICAL

C0/C180 optics	180°
Light distribution simmetry	Symmetrical

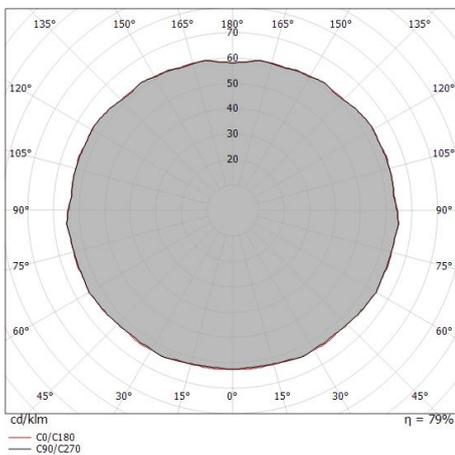




Oh!\_FL65 E27 | Floor Lamp | Accessories  
**16162**




Outer casing - outer casing for installation on ground or on concrete

**Code**  
14930




Pegs  
installation position: land,Cover material: pc

**Code**  
14931



anti-theft - anti-theft ground fixing bracket

**Code**  
14081



Tie rods

**Code**  
53890



Connector

**Code**  
14992