


# Oh!\_FL65 LED



Floor Lamp | 1 topLED 7 W DC 350 mA | CRI 80  
**16190**

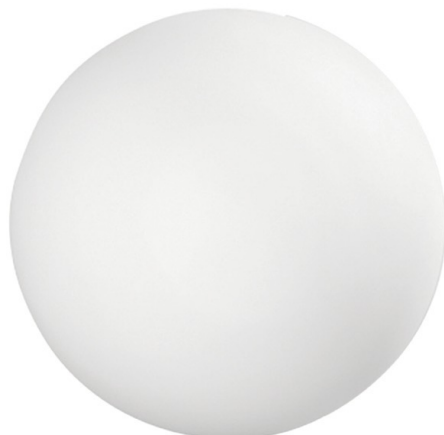

Technical data	
Type	Floor Lamp
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Source lumens	1022 lm
Current intensity	350mA
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP65
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	5 m
Resin potting	No
Type of light emission	Double emission
Net weight	1.440 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing diffuser	
Material	PE
Colour	neutral

Finishing mounting frame	
Material	PC
Colour	white

# Oh!\_FL65 LED



Floor Lamp | 1 topLED 7 W DC 350 mA | CRI 80 | Base  
**16190**


Double emission floor lamp for outdoor application. The warm white LED light source with a diffused light distribution is composed of 1 topLED LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 1022 lm, with a 146.0 lm/W nominal luminous efficacy.

The diffuser is made of pe; the mounting frame is made of PC, with a white finish. The ingress protection degree is IP65; the total weight is of 1.440 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 7 W. The power supply cable is included and features a 5 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 14930(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

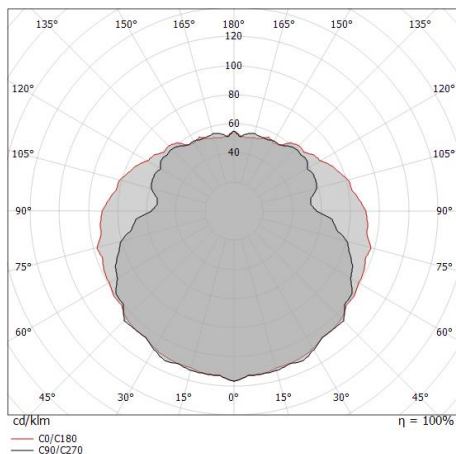

## Energy efficiency class

This product contains a light source of energy efficiency class F. This product contains 2 light sources of energy efficiency class D.

## Illuminotechnical Features

Light Output Ratio (LOR)	82 %
Source lumens	1022 lm
Delivered lumens	848 lm
Consumption	8 W
Luminaire efficacy	106 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Junction temperature (lighting fixture)	80

Standard Operating Ambient Temperature -20 / +50°C

## LED Life / Failure Ratio

L80 B20 C0 72500h

## UGR

UGR axial	16.9
UGR transversal	18
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

## OPTICAL

C0/C180 optics	178°
Light distribution symmetry	Symmetrical

# Oh!\_FL65 LED




Oh!\_FL65 LED | Floor Lamp | Accessories  
**16190**




Outer casing - outer casing for installation on ground or on concrete

**Code**  
14930



Pegs  
installation position: land,Cover material: pc

**Code**  
14931



Power supply

**Code**  
KIT0066