


Snake_W2



Wall Lights | 1 topLED 1.5 W DC 500 mA | CRI 90
7229



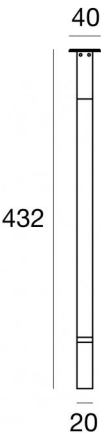

| Technical data | |
|--|-----------------------|
| Designer | Linea Light |
| Construction year | 2011 |
| Type | Surface |
| Installation position | Wall lights - Ceiling |
| Installation environment | Indoor |
| Light Source | LED |
| Source lumens | 178 lm |
| Current intensity | 500mA |
| CCT / Tone | 3000 K |
| Colour rendering index | 90 Ra |
| C.C. / C.V. | CC |
| Safety class | 3 |
| IP | IP40 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| Driver included | No |
| Dimmable article | No |
| Directional | Swivelling |
| total angle (vertical plane) | 360 ° |
| total angle (horizontal plane) | 360 ° |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | No |
| Resin potting | No |
| Type of light emission | Single emission |
| Net weight | 0.350 Kg |
| Electrostatic discharge protection | No |
| Surge protection | No |

| Finishing casing | |
|------------------|-------------------------|
| Material | Aluminium |
| Colour | Embossed white RAL 9003 |
| Processing | Coating |

| Finishing diffuser | |
|--------------------|-----------------|
| Material | PC |
| Colour | white |
| Processing | Satin finishing |

| Finishing mounting frame | |
|--------------------------|-------------------------|
| Material | Iron |
| Colour | Embossed white RAL 9003 |
| Processing | Coating |

| Electronics | |
|---|---------------------|
|  | KIT72 Controller |
|  | KIT73 Controller |

Wall Lights | 1 topLED 1.5 W DC 500 mA | CRI 90 | Base 7229



Single emission wall lights for indoor application. The warm white LED light source with a diffused light distribution is composed of 1 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 178 lm, with a 118.7 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of PC with a satin finishing treatment; the mounting frame is made of iron, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 0.350 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 1.5 W.

The device features protection class III and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

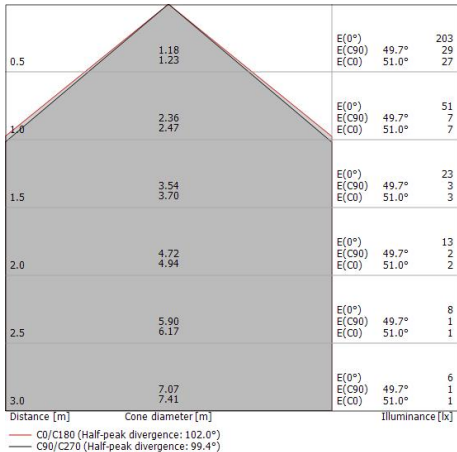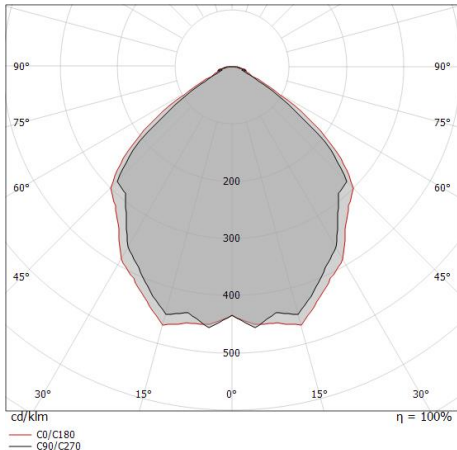

Energy efficiency class

This product contains a light source of energy efficiency class F.

Illuminotechnical Features

| | |
|---|---------|
| Light Output Ratio (LOR) | 65 % |
| Source lumens | 178 lm |
| Delivered lumens | 117 lm |
| Consumption | 2,0 W |
| Luminaire efficacy | 58 lm/W |
| Colour temperature | 3000 K |
| Colour rendering index | 90 Ra |
| Junction temperature (lighting fixture) | 80 |

| | |
|--|------|
| Standard Operating Ambient Temperature | 25°C |
|--|------|

LED Life / Failure Ratio

| |
|-------------------|
| L80 B20 C0 80000h |
|-------------------|

UGR

| | |
|-------------------|----------|
| UGR axial | 26.9 |
| UGR transversal | 27.6 |
| X=4H Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

OPTICAL

| | |
|-----------------------------|-------------|
| C0/C180 optics | 99° |
| Light distribution simmetry | Symmetrical |