




Floor Lamp | 220-240 V
88 topLED 23 W DC - 25 W AC | CRI 90
7628

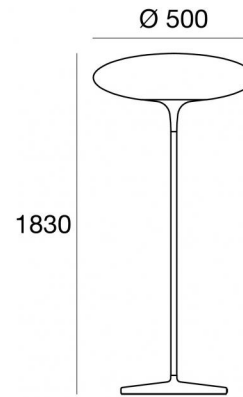

Technical data	
Installation position	Floor
Installation environment	Indoor
Light Source	LED
Optics	Diffused
Nominal power	23 W DC
Total Power	25 W
Source lumens	2522 lm
Voltage	220 - 240 V AC
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Electric socket	Type C
Cable length	3,50 m
Resin potting	No
Type of light emission	Double emission
Net weight	5.524 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing

Material	Iron
Colour	Embossed white RAL 9003
Processing	Coating

Finishing diffuser

Material	PE
Colour	neutral



Floor Lamp | 220-240 V | 88 topLED 23 W DC - 25 W AC | CRI 90 | Base
7628

Double emission floor lamp for indoor application. The warm white LED light source with a diffused light distribution is composed of 88 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2522 lm, with a 109.7 lm/W nominal luminous efficacy.

The device body is made of iron and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of pe. The ingress protection degree is IP40; the total weight is of 5.524 kg.

The total absorbed power is 25 W. The power supply cable is included and features a 3,50 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class F.

Illuminotechnical Features

Light Output Ratio (LOR)	91 %
Source lumens	2522 lm
Delivered lumens	2310 lm
Consumption	25 W
Luminaire efficacy	92 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80

Standard Operating Ambient Temperature 25°C

LED Life / Failure Ratio

L80 B20 C0 80000h

OPTICAL

C90/C270 optics	124°
C0/C180 optics	134°
Light distribution symmetry	Symmetrical 2 axis

