



WEVER & DUCRÉ
LIGHTING

CLEA 3.0

181384B5

Project
Type
Notes
Quantity
Date

GENERAL

Ceiling
 Surface
 Black Matt
 RAL 9011^a
 IP20
 Interior
 835 lm

LED

3000 K
 CRI ≥ 90
 L80 / 50000 h
 2-step binning

OPTICAL

Opal


ELECTRICAL

phase-cut dim
 220 - 240 V
 Total connected power 14.1 W
 Class 1
 Safety distance 0.3 m


PHYSICAL

Diameter 700 mm
 Height 90 mm
 2.1 kg

^a Color may deviate slightly due to production conditions.



Round shape ceiling surface mounted luminaire with diffuse light; aluminium base in White Matt wet painted; matt texture; steel diffuser; surface Black Matt wet painted; matt texture; RAL 9011; white opal glass handblown; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; binning initial MacAdam 2 SDCM; CRI 90; CRI (Colour Rendering Index) 90; degree of protection IP20; PCI; driver included; light source replaceable by an authorized professional; control gear replaceable by end-user;

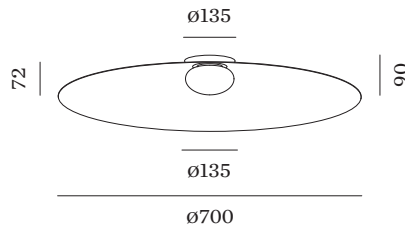




WEVER & DUCRÉ
LIGHTING

CLEA 3.0

181384B5

LIGHT DISTRIBUTION



Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.96	0.92	0.88	0.85	0.81
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.