



WEVER & DUCRÉ  
LIGHTING

# CLEA WALL 2.0

181584W3

Project	
Type	
Notes	
Quantity	
Date	

## GENERAL

Wall
Surface
White Matt
RAL 9003 <sup>a</sup>
IP20
Interior
615 lm

## LED

2700 K
CRI $\geq$ 90
L80 / 50000 h
2-step binning

## OPTICAL

Opal
------



## ELECTRICAL

phase-cut dim
220 - 240 V
Total connected power 9.9 W
Class 1
Safety distance 0.3 m


## PHYSICAL

Diameter 500 mm
Height 134 mm
1.3 kg

<sup>a</sup> Color may deviate slightly due to production conditions.

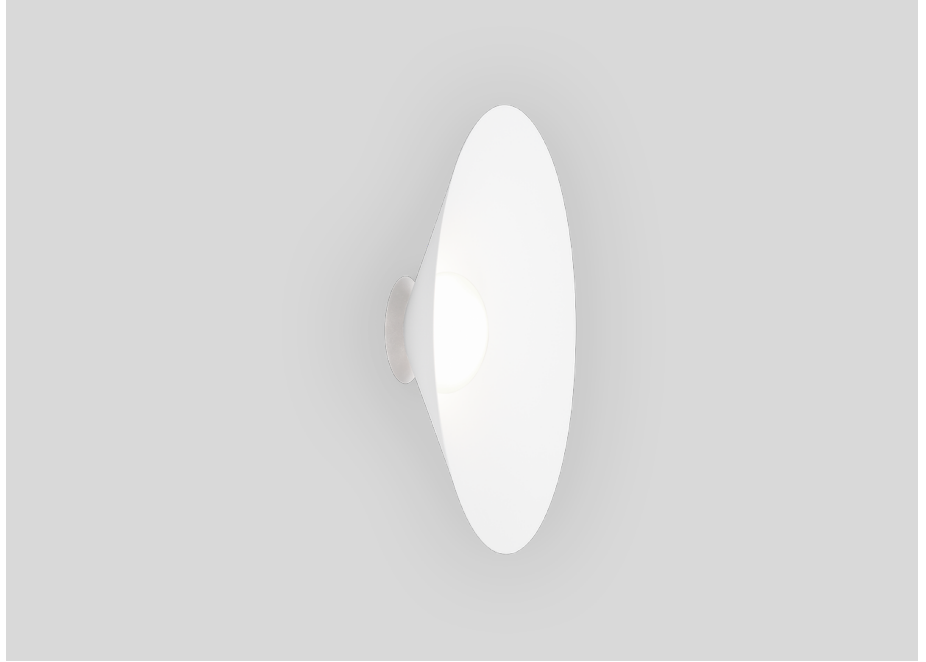

Round shape wall surface mounted luminaire with diffuse light; aluminium base in White Matt wet painted; matt texture; steel diffuser; surface White Matt wet painted; matt texture; RAL 9003; white opal glass handblown; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; binning initial MacAdam  $\leq$  2 SDCM; CRI  $\geq$  90; CRI (Colour Rendering Index)  $\geq$  90; degree of protection IP20; PC1; driver included; light source replaceable by an authorized professional; control gear replaceable by end-user;






**WEVER & DUCRÉ**  
LIGHTING

# CLEA WALL 2.0

181584W3

## LIGHT DISTRIBUTION



## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.96	0.92	0.88	0.85	0.81
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF <sup>a</sup>	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF <sup>a</sup>	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.