

WALL 1.0

370584CH3

GENERAL

Wall	
Surface	
Black Ma	tt + Champagne
IP20	
Interior	
350 lm	

LED

 $2700\,\mathrm{K}$


ELECTRICAL


phase-cut dim
220 - 240 V
Total connected power 6.0 W
Class 1
Safety distance 0.3 m

PHYSICAL


Length 9 mm
Width 115 mm
Height 623 mm
0.1 kg



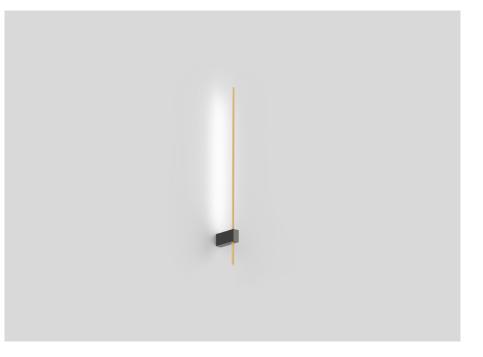



Wall surface luminaire made from aluminium; surface Black Matt + Champagne; powder coated; matt texture; opal PMMA diffuser; PCB 3-step binning; phase-cut dim; light colour 2700 K; CRI (Colour Rendering Index) 🛛 90; 220 - 240 V; degree of protection IP20; PC1; driver included; light source replaceable by an authorized professional; control gear replaceable by end-user;



1/2



370584CH3

MOUNTING

wall-/base-spacer				
ТҮРЕ	L·W·H (MM)	ORDERCODE		
FINLIN	45.27.38	900195B0		