



TAPIS 2.0


336274FJ3

Project	
Туре	
Notes	
Quantity	
Date	

GENERAL
Wall
Surface
Feel Jade
similar to NCS S 2005 – G90Y ^a
IP20
Interior
380 lm
LED
2700 K
3-step binning
ELECTRICAL
where out dim
phase-cut dim 220 - 240 V
phase-cut dim
phase-cut dim 220 - 240 V Total connected power 9.0 W Class 1
phase-cut dim 220 - 240 V Total connected power 9.0 W Class 1
phase-cut dim 220 - 240 V Total connected power 9.0 W Class 1 Safety distance 0.3 m
phase-cut dim 220 - 240 V Total connected power 9.0 W Class 1 Safety distance 0.3 m PHYSICAL
phase-cut dim 220 - 240 V Total connected power 9.0 W Class 1 Safety distance 0.3 m PHYSICAL Length 450 mm
phase-cut dim 220 - 240 V Total connected power 9.0 W Class 1 Safety distance 0.3 m PHYSICAL Length 450 mm Width 120 mm
phase-cut dim 220 - 240 V Total connected power 9.0 W Class 1 Safety distance 0.3 m PHYSICAL Length 450 mm Width 120 mm
phase-cut dim 220 - 240 V Total connected power 9.0 W Class 1 Safety distance 0.3 m PHYSICAL Length 450 mm



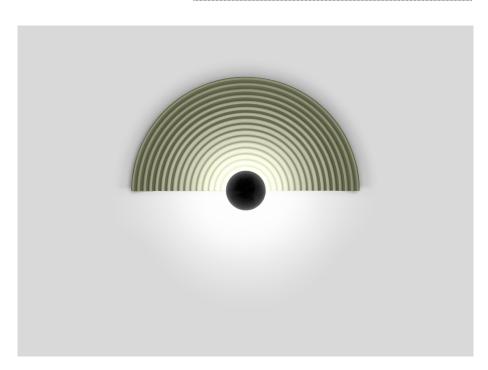



Wall surface luminaire made from composite; indirect light distribution; surface colour "Feel Jade"; similar to NCS S 2005 – G90Y; PCB 3-step binning; phase-cut dim; light colour 2700 K; binning initial MacAdam \leq 3 SDCM; 220 - 240 V; degree of protection IP20; PC1; driver included; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;



April 28, 2023