



WEVER & DUCRÉ
LIGHTING

TAPIS 2.0

336274GW5

Project

Type

Notes

Quantity

Date

GENERAL

Wall

Surface

Give Warmth

similar to RAL 080 80 10^a

IP20

Interior

390 lm

LED

3000 K

3-step binning

ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 9.0 W

Class 1

Safety distance 0.3 m

PHYSICAL



Length 450 mm

Width 120 mm

Height 225 mm

1.9 kg

^a Color may deviate slightly due to production conditions.

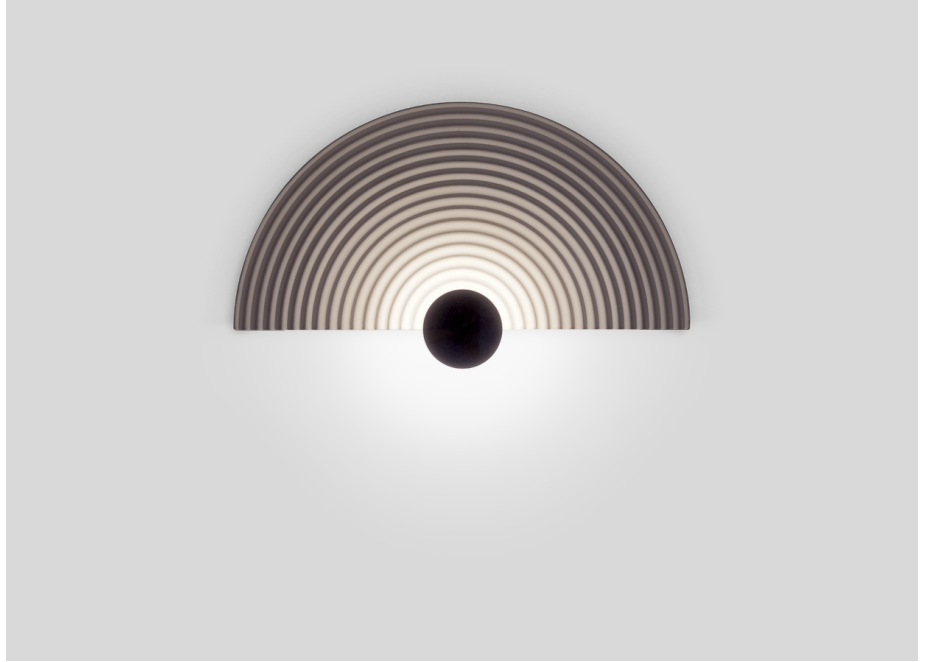

Wall surface luminaire made from composite; indirect light distribution; surface colour "Give Warmth"; similar to RAL 080 80 10; PCB 3-step binning; phase-cut dim; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; 220 - 240 V; degree of protection IP20; PC1; driver included; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

