



WEVER & DUCRÉ  
LIGHTING

# TAPIS 3.0

336374GW5

Project

Type

Notes

Quantity

Date

## GENERAL

Wall

Surface

Give Warmth

similar to RAL 080 80 10<sup>a</sup>

IP20

Interior

390 lm

## LED

3000 K

3-step binning

## ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 9.0 W

Class 1

Safety distance 0.3 m

## PHYSICAL



Length 225 mm

Width 120 mm

Height 450 mm

1.7 kg

<sup>a</sup> Color may deviate slightly due to production conditions.

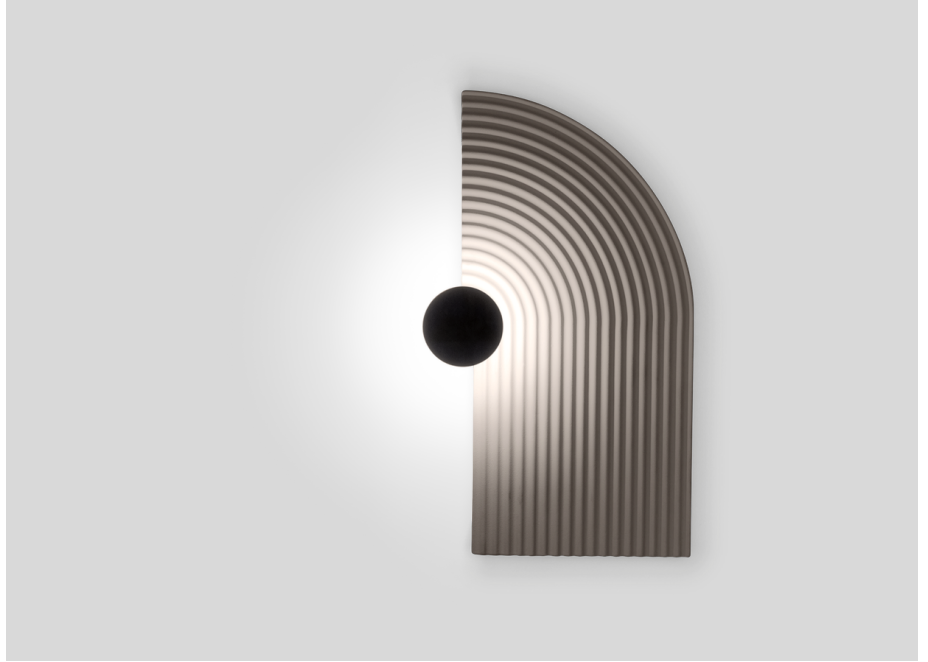

Wall surface luminaire made from composite; indirect light distribution; surface colour "Give Warmth"; similar to RAL 080 80 10; PCB 3-step binning; phase-cut dim; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; 220 - 240 V; degree of protection IP20; PC1; driver included; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

