

Downlights | 1 x powerLED 1.5 W DC 500 mA | CRI 80
87330W00





Technical data	
Type	Semi-recessed
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optics	Diffused
Nominal power	1.5 W DC
Source lumens	143 lm
Current intensity	500mA
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP54
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.12 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.057 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing	
Material	Brass
Colour	chrome
Processing	Electroplating

Finishing diffuser	
Material	Glass
Colour	transparent

Electronics

 89146
On/Off Driver 198~264V AC / 180~275V DC (2 - 3 art.)

 99195
On/Off Driver 198~264V AC / 180~275V DC (1 - 2 art.)

 99377
On/Off Driver 198~264V AC (3 - 6 art.)

Downlights | 1 x powerLED 1.5 W DC 500 mA | CRI 80 | Base
87330W00


Single emission downlights for indoor application. The warm white LED light source with a diffused light distribution is composed of 1 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 143 lm, with a 95.3 lm/W nominal luminous efficacy.

The device body is made of brass and features a chrome finish, processed by means of electroplating; the diffuser is made of glass. The ingress protection degree is IP54; the total weight is of 0.057 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 1.5 W. The power supply cable is included and features a 0.12 m length.

The device features protection class III and can be ceiling-mounted, with a 15 mm diameter hole (in plasterboard) with an outer casing, code 84917(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

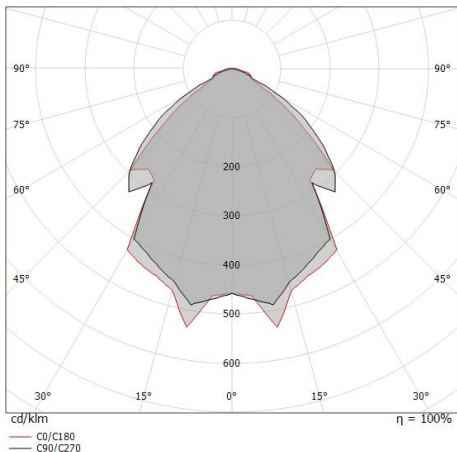

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	1.18 1.05	E(0°) 169 E(C90) 24 E(C0) 33
1.0	2.36 2.09	E(0°) 42 E(C90) 6 E(C0) 8
1.5	3.54 3.14	E(0°) 19 E(C90) 3 E(C0) 4
2.0	4.72 4.19	E(0°) 11 E(C90) 2 E(C0) 2
2.5	5.90 5.23	E(0°) 7 E(C90) 1 E(C0) 1
3.0	7.07 6.28	E(0°) 5 E(C90) 1 E(C0) 1

— C0/C180 (Half-peak divergence: 92.6°)
— C90/C270 (Half-peak divergence: 99.4°)

Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	65 %
Source lumens	143 lm
Delivered lumens	93 lm
Consumption	1,5 W
Luminaire efficacy	93 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	1/16 ANSI BIN
Colour rendering index	80 Ra

Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio

L70 B10 C0 197960h (at Tj 60 Ta 25)

UGR

UGR axial	27.4
UGR transversal	27.2
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C90/C270 optics	99°
C0/C180 optics	93°
Light distribution simmetry	Symmetrical 2 assis



Gude | Downlights | Accessories
87330W00



Outer casing
Type of installation: masonry L=80mm, H=60mm, D=60mm

Code
84917