




Downlights | 1 x 5mmLED 0.5 W DC 24 V | CRI 75
87337W00

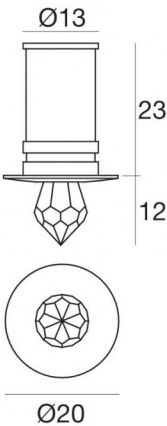

Technical data	
Type	Semi-recessed
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optics	Diffused
Light emission direction	downward
Nominal power	0.5 W DC
Voltage	24V
CCT / Tone	3000 K
Colour rendering index	75 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.12 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.015 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing	
Material	Brass
Colour	chrome
Processing	Electroplating
Finishing diffuser	
Material	Glass
Colour	transparent



Downlights | 1 x 5mmLED 0.5 W DC 24 V | CRI 75
87337W00

Single emission downlights for indoor application. The warm white LED light source with a diffused light distribution is composed of 1 5mmled LEDs with CCT of 3000 K and a CRI 75.

The device body is made of brass and features a chrome finish, processed by means of electroplating; the diffuser is made of glass. The ingress protection degree is IP20; the total weight is of 0.015 kg. The power supply driver is not provided and is to be ordered separately.



The total absorbed power is 0.5 W. The power supply cable is included and features a 0.12 m length.

The device features protection class III and can be ceiling-mounted, with a 15 mm diameter hole (in plasterboard) with an outer casing, code 84916(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features	
Colour temperature	3000 K
Colour rendering index	75 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

Elin | Downlights | Accessories
87337W00

	<p>Outer casing</p> <p>Type of installation: masonry L=35mm, H=20mm, D=20mm</p>	<p>Code</p> <p>84335</p>
	<p>Outer casing</p> <p>installation position: floor; type of installation: masonry L=48mm, H=60mm, D=60mm.</p> <p>Material:ABS, colour:black.</p>	<p>Code</p> <p>84916</p>