


Box_W1 Mono Emission



Wall Lights | 220-240 V | 36 topLED 13 W DC - 14 W AC | CRI 80
8773N



Technical data	
Type	Wall Lights
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Total Power	14 W
Source lumens	1677 lm
Voltage	220 - 240 V AC
Frequency	60 - 50 Hz
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	No
CE	No
Driver included	Driver
Dimmable article	Phase cut
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	1 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing diffuser	
Material	PMMA
Colour	opaline

Finishing mounting frame	
Material	Iron
Colour	concrete dark grey
Processing	Coating

Box_W1 Mono Emission



Wall Lights | 220-240 V | 36 topLED 13 W DC - 14 W AC | CRI 80 | Base 8773N

Single emission wall lights for indoor application. The natural white LED light source with a diffused light distribution is composed of 36 topLED LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 1677 lm, with a 129.0 lm/W nominal luminous efficacy.

The diffuser is made of pmma; the mounting frame is made of iron, with a concrete dark grey finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 1 kg.

The total absorbed power is 14 W.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class D.

Illuminotechnical Features

Light Output Ratio (LOR)	76 %
Source lumens	1677 lm
Delivered lumens	1285 lm
Consumption	14 W
Luminaire efficacy	91 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

LED Life / Failure Ratio


L70 B20 C0 72500h

UGR

UGR axial	20.7
UGR transversal	26.3
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C90/C270 optics	111°
C0/C180 optics	126°
Light distribution symmetry	Symmetrical 2 axis

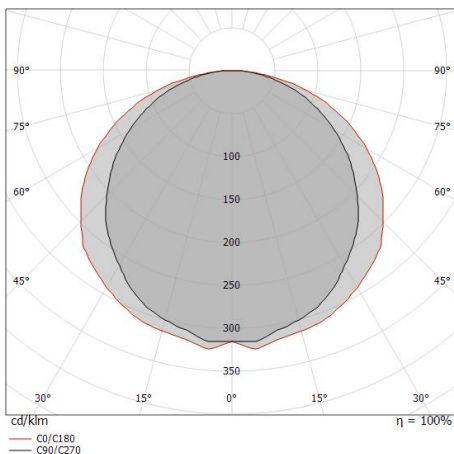

Distance [m]	Cone diameter [m]	Illuminance [lx]	E(0°)	E(C90)	E(C0)
0.5	1.46 1.98	1621 148 77	55.5°	63.2°	77
1.0	2.91 3.96	405 37 19	55.5°	63.2°	19
1.5	4.37 5.94	180 16 9	55.5°	63.2°	9
2.0	5.82 7.92	101 9 5	55.5°	63.2°	5
2.5	7.28 9.90	65 6 3	55.5°	63.2°	3
3.0	8.73 11.88	45 4 2	55.5°	63.2°	2

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 126.4°)
— C90/C270 (Half-peak divergence: 111.0°)

Box_W1 Mono Emission



Box_W1 Mono Emission | Wall Lights | Accessories
8773N



Dimmer
220-240V

Code

KIT0026