
Box_W1 Mono Emission


Wall Lights | 220-240 V 1 topLED 13 W DC - 14 W AC | CRI 80 8915





Technical data	
Designer	Linea Light
Construction year	2020
Туре	Wall Lights
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Total Power	14 W
Source lumens	1543 lm
Voltage	220 - 240 V AC
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	Phase cut
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	1 Kg
Electrostatic discharge protection	No
Surge protection	No





Finishing casing		
Material	Brass	
Finishing diffus	er	
Material	PMMA	
Colour	opaline	
Processing	Satin finishing	
Finishing mounting frame		
Material	Aluminium	
Colour	white	
Processing	Coating	

Wall Lights | 220-240 V | 1 topLED 13 W DC - 14 W AC | CRI 80 | Base 8915

Single emission wall lights for indoor application. The warm white LED light source with a diffused light distribution is composed of 1 topled LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 1543 lm, with a 118.7 lm/W nominal luminous efficacy.

The device body is made of brass; the diffuser is made of pmma with a satin finishing treatment; the mounting frame is made of aluminium, with a white finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 1 kg.

The total absorbed power is 14 W.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class D.


Illuminotechnical Features	
Light Output Ratio (LOR)	75 %
Source lumens	1543 lm
Delivered lumens	1168 lm
Consumption	14 W
Luminaire efficacy	83 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

LED Life / Failure Ratio

L70 B20 C0 72500h

28.8
30.3
S=0.25H
70/50/20

OPTICAL	
C90/C270 optics	111°
C0/C180 optics	126°
Light distribution simmetry	Symmetrical 2 assis

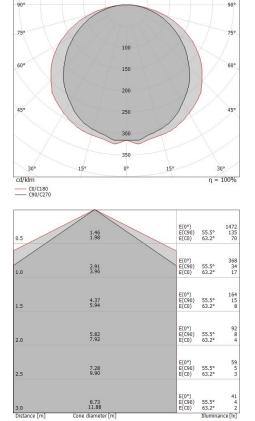

C0/C180 (Half-peak divergence: 126.4°)
C90/C270 (Half-peak divergence: 111.0°)

translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

2/3 5.05.2023

Box_W1 Mono Emission | Wall Lights | Accessories 8915



Dimmer 220-240V Code KIT0026