



Box_W1 Mono Emission

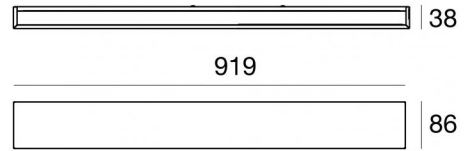

Wall Lights | 220-240 V | 108 topLED 39 W DC - 41 W AC | CRI 80
8777N

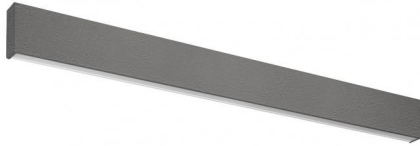

Technical data	
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Optics	Diffused
Light emission direction	upward
Nominal power	39 W DC
Total Power	41 W
Source lumens	5031 lm
Voltage	220 - 240 V AC
Frequency	60 - 50 Hz
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	No
CE	No
Driver included	Driver
Dimmable article	Phase cut
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	1,924 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing	
Material	Iron
Colour	concrete dark grey
Processing	Coating

Finishing diffuser	
Material	PMMA
Colour	opaline

Box_W1 Mono Emission



Wall Lights | 220-240 V | 108 topLED 39 W DC - 41 W AC | CRI 80 | Base 8777N

Single emission wall lights for indoor application. The natural white LED light source with a diffused light distribution is composed of 108 topLED LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 5031 lm, with a 129.0 lm/W nominal luminous efficacy.

The device body is made of iron and features a concrete dark grey finish, processed by means of coating; the diffuser is made of pmma. The ingress protection degree is IP40; the total weight is of 1,924 kg.

The total absorbed power is 41 W.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains 3 light sources of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	75 %
Source lumens	5031 lm
Delivered lumens	3780 lm
Consumption	41 W
Luminaire efficacy	92 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Junction temperature (lighting fixture)	80

Standard Operating Ambient Temperature 25°C

LED Life / Failure Ratio


L70 B20 C0 72500h

UGR

UGR axial	17.3
UGR transversal	24
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C90/C270 optics	111°
C0/C180 optics	126°
Light distribution simmetry	Symmetrical 2 assis

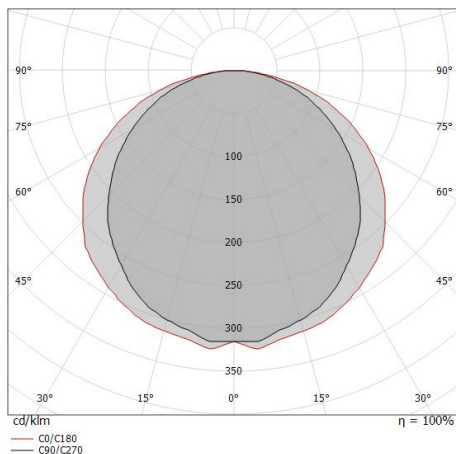

Distance [m]	Cone diameter [m]	Illuminance [lx]	E(0°)	E(C90)	E(C0)
0.5	1.46 1.98	4768 437 226	55.5°	63.2°	
1.0	2.91 3.96	1192 109 57	55.5°	63.2°	
1.5	4.37 5.94	530 49 25	55.5°	63.2°	
2.0	5.82 7.92	298 27 14	55.5°	63.2°	
2.5	7.28 9.90	191 17 9	55.5°	63.2°	
3.0	8.73 11.88	132 12 6	55.5°	63.2°	

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 126.4°)
— C90/C270 (Half-peak divergence: 111.0°)

Box_W1 Mono Emission



Box_W1 Mono Emission | Wall Lights | Accessories
8777N



Dimmer
220-240V

Code

KIT0026